



VIDEO/AUDIO SELECTOR

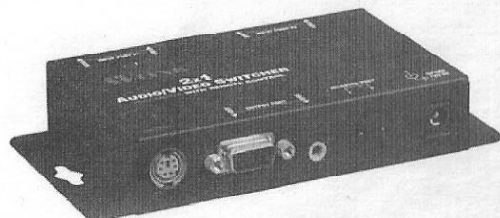

(MSV21A)

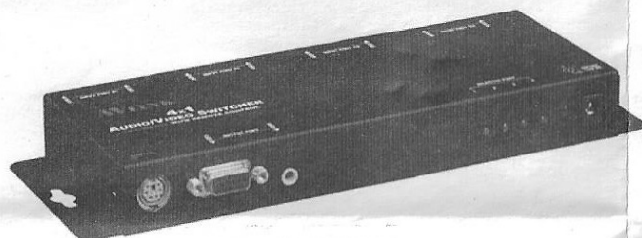

(MSV41A)

USER MANUAL MSV21A / MSV41A

V1.0

Package Contents -

- 1 MSV21A or MSV41A Selector
- 1 user manual
- 2 screws
- 4 foot pads
- 1 remote control cable

Any thing missed, please contact with your vendor.

Features

Video:

- Resolution up to 1920x1440.
- Pixel frequency up to 250MHz.
- Supports the DDC1, DDC2, DDC2B, DDC2B+, DDC2AB. (For video out port 1)
- Hot pluggable.
- Auto skips over the power-off and suspended PC and the unplugged VGA cable.

Audio:

- Operation Frequency: 50Hz~15KHz.
- Input Impedance: 20KΩ.
- Max. Audio Input: 2.5Vp-p.
- Input Connector: 3.5φmini-stereo jack.

Specification

Function		MSV21A	MSV41A
Video Input Connector (HD-15 Female)		2	4
Video Output Connector (HD-15 Female)		1	
Audio Input Connector (3.5φ Mini-Stereo Jack)		2	4
Audio Output Connector (3.5φ Mini-Stereo Jack)		1	
LEDs	On Line	2	4
CTRL Connector		MD-6 (Female)	
VGA Resolution		1920 x 1440	
Housing		Metal	
Weight		310g	460g
Dimensions (LxWxH) mm		150*84*25	230*84*25

Hardware Requirements

	Requirement specifications
Monitor (Projector)	One highest resolution VGA, SVGA, Multisync, PLASMA monitor or projector.
PC	One VGA, SVGA or Multisync card.
Cable	Standard cable.

Front View




1. CTRL
Connected "Remote Control Cable" and switch Input port.
2. Video Output Connector
3. Audio Output Connector
4. Port LEDs
Green LEDs light up while the PC has successfully been selected.
5. Power Supply(SPARE)

Rear View



1. Video Input Connector
2. Audio Input Connector

Remote Control Cable

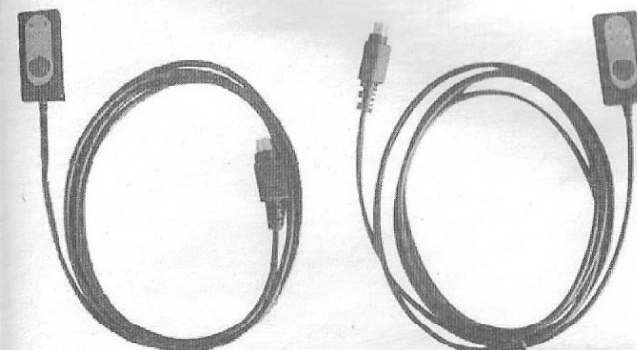

1. Port LEDs
Red LEDs light up while the PC has successfully been selected.
2. Port Selection Switches (Manual type)
Press the switch to access the chose PC.