


DIRECT BURIAL AUDIO CABLE

16 AWG / 2 Conductor

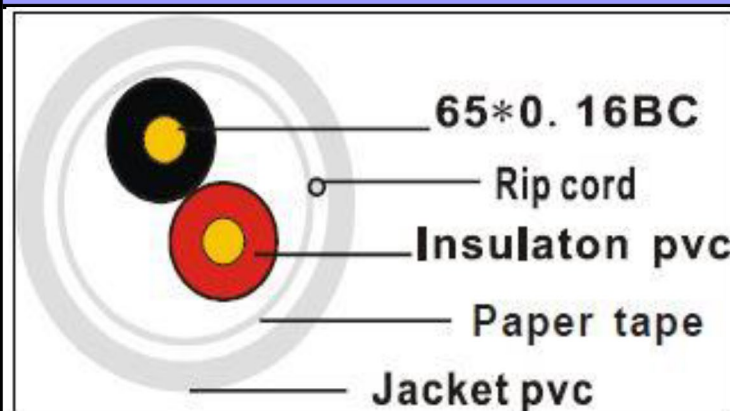

Description

16/2 Stranded CMR/CL3R Direct Burial Sound Audio Cable

Applicable Standards

- For Communication and Signal Control Systems
- 2 Oxygen Free Bare Copper Conductors in an Overall Jacket

Physical Characteristics

Conductor		Oxygen Free B.C.
Number of Conductors		2
AWG		16
Stranding		65
Diameter	(inches)	0.0063
Insulation		PVC
Diameter	(inches)	0.0827
Nominal Wall	(inches)	0.0098
Jacket		FR-PVC
Overall Diameter	(inches)	0.2008
Nominal Thickness	(inches)	0.0197
Paper Tape		Yes
Rip Cord		Yes
Conductor Resistance	(ohms / 1000m)	15.8
Voltage	(volts)	300
Nominal Weight	(pounds)	16
Temperature Rating		-20°C - 70°C

Colors

Insulation Colors Black / Red

Part Numbers

Part Number	Color	Put-up
AC1602OSPBK4-500	Black	500' Reelex II

Cable Marking

AUDIO CABLE 2 COND 16 AWG HI-STRAND OXYGEN FREE COPPER
 CMR/CL3R DIRECT BURIAL AUDIO CABLE SUN RES XXXXXX C(ETL)US
 ***FT