


## CISCO(TM) COMPATIBLE (GLC-LH-SM) GE SFP LC CONNECTOR LX/LH TRANSCEIVER

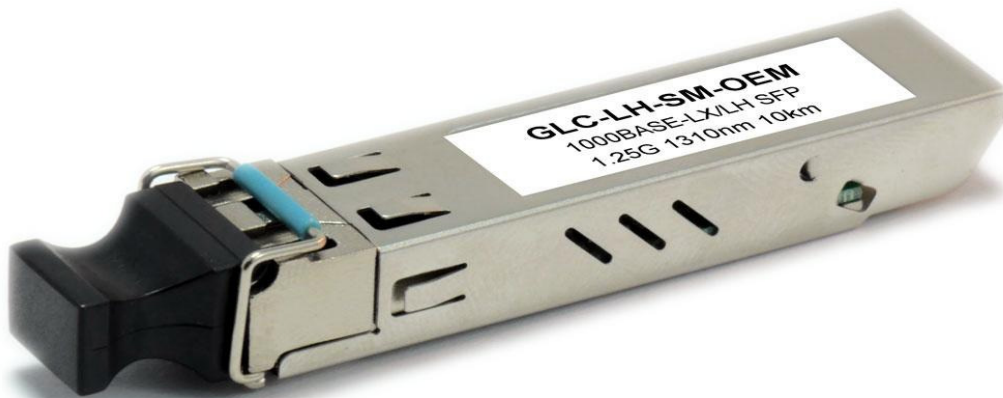

<b>Lengths Available:</b>			
<b>Colors Available:</b>			
<b>Part Numbers this model:</b>	BE-190518		
<b>Sales Category:</b>	Fiber Optic Jumpers	<b>Wire Gauge (AWG):</b>	Not Specific / Not Applicable
<b>Connector A:</b>	Fiber Optic SFP Connector	<b>Specification:</b>	
<b>Connector B:</b>	Fiber Optic SFP Connector	<b>Number Ports:</b>	N/A
<b>Export Tariff Code (HST):</b>	8525503035	<b>Transfer Rate:</b>	

<b>Feature / Style:</b>		<b>Images Length/Size Shown:</b>	EA
<b># Positions:</b>		<b>Shielding:</b>	
<b>Convert From/To:</b>		<b>Type:</b>	HDMI to AV

The Cisco(TM) compatible GLC-LH-SM-OEM modules offer customers a wide variety of 10 Gigabit Ethernet connectivity options for data center, enterprise wiring closet, and service provider transport applications. The 1000BASE-LX/LH SFP, compatible with the IEEE 802.3z 1000BASE-LX standard, operates on standard single-mode fiber-optic link spans of up to 10 km and up to 550 m on any multimode fibers. When used over legacy multimode fiber type, the transmitter should be coupled through a mode conditioning patch cable.

1.25GBd SFP (Small Form Pluggable) Long Wavelength (1310nm) Transceiver

**Features:**

- Up to 1.25 GBd bi-directional data links
- Compliant with IEEE 802.3z Gigabit Ethernet and 1000BASELX and SFP MSA
- Hot-pluggable SFP footprint
- 1310nm Fabry-Perot laser transmitter
- Duplex LC connector
- Built-in digital diagnostic functions
- Compatible for use on all specified Cisco(TM) Switches
- Up to 10km on 9/125um SMF
- Single power supply 3.3V
- RoHS Compliance
- Class 1 laser product complies with EN 60825-1
- Operating temperature range: 0C to 70C.

NOTE: Cisco is TRADEMARK Cisco Corp