


CAT6 ANGLED-DOWN ETHERNET RJ45 PATCH CABLE, NON-BOOTED, BLACK

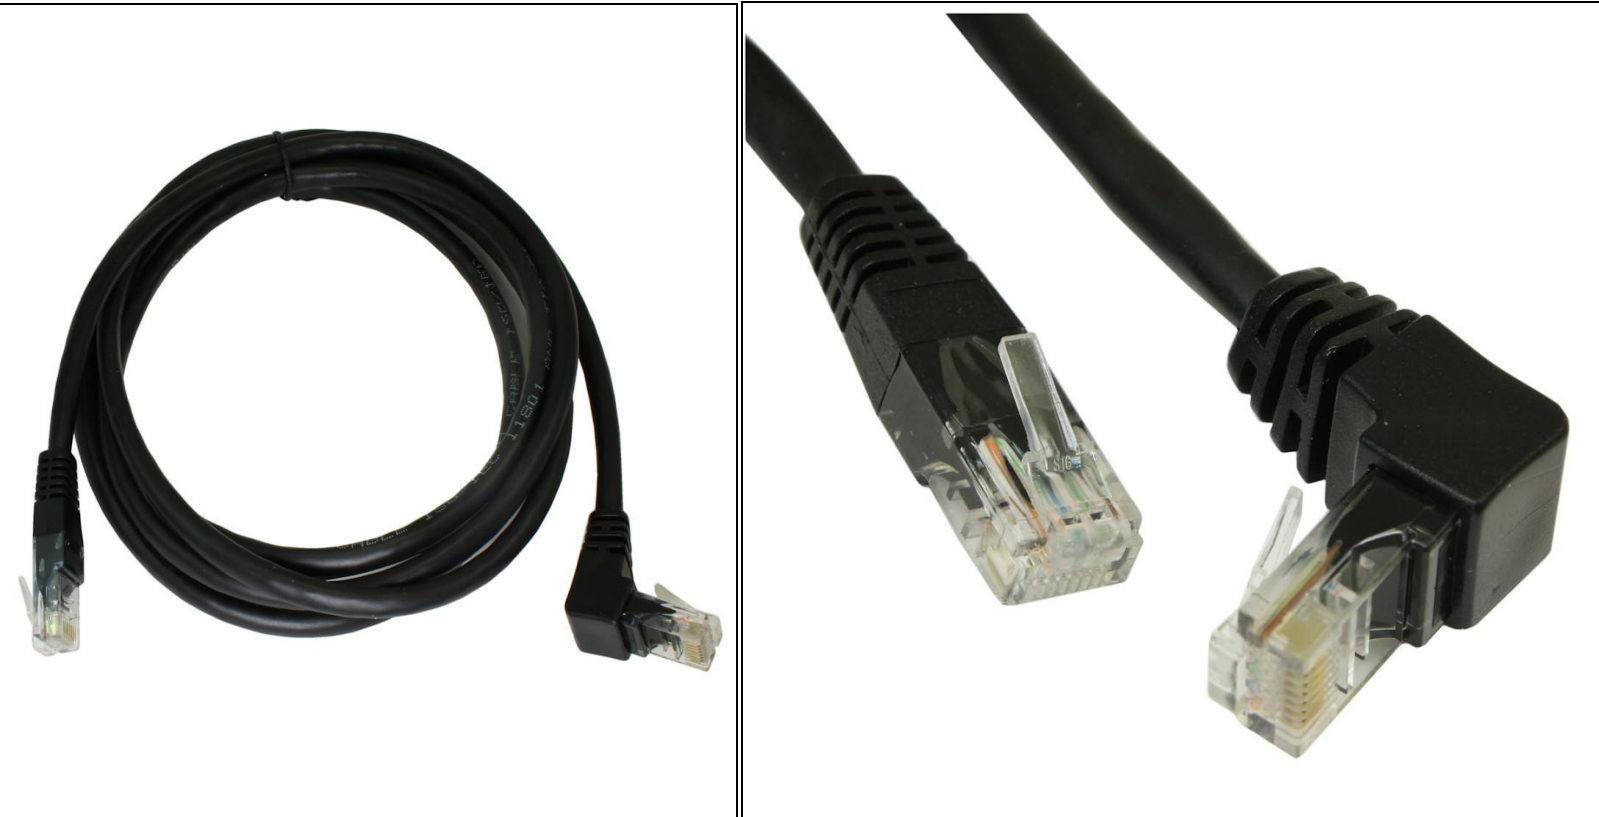

Lengths Available:	6in, 1ft, 2ft, 3ft, 4ft, 5ft, 6ft, 7ft, 10ft, 14ft, 20ft, 25ft,		
Colors Available:	Black		
Part Numbers this model:	FE-C6270-6IN-BLK, FE-C6270-01-BLK, FE-C6270-02-BLK, FE-C6270-03-BLK, FE-C6270-04-BLK , FE-C6270-05-BLK, FE-C6270-06-BLK, FE-C6270-07-BLK, FE-C6270-10-BLK, FE-C6270-14-BLK, FE-C6270-20-BLK, FE-C6270-25-BLK,		
Sales Category:	CAT 6 Networking Cables	Wire Gauge (AWG):	24 AWG
Connector A:	RJ45 Ethernet Male	Specification:	
Connector B:	RJ45 Ethernet Male	Number Ports:	N/A
Export Tariff Code (HST):	8544422000	Transfer Rate:	
Feature / Style:	Molded Plug, Strain Relief Plug to Plug, Angled Up	Images Length/Size Shown:	4 FT
# Positions:	8p8c (RJ45, Ethernet)	Shielding:	Unshielded
Convert From/To:		Type:	Round Cable

Connects any CAT6 application such as computer to hub, patch panel or wall jack. This 550MHz CAT6 PVC stranded patch cord meets TIA/EIA 568A specifications, and support all CAT6 and other high speed applications. One end is ANGLED 90 degrees. When plugged into a female jack, this will normally have the cable angle DOWNWARDS. It has stranded wires for added cable flexibility.

Technical Specifications:

- 24AWG Copper twisted pairs
- Suitable for any 10Mbit, 100Mbit, & 1Gbit network standards up to 1000ft segment runs
- 550 Mhz Category 6, exceed IEEE standards
- Unshielded Twisted pairs (UTP) suitable for most business and home network installations
- Cable Category: CM NEC Rated for In-wall installation (Home or business)
- EIA/TIA TSB-40A ETL Verified, for Stranded 568B standards
- 50u" Gold Plated contacted
- 1 End 90 Degree ANGLE, the other end STRAIGHT
- Molded Strain Relief boot connectors
- RoHS Compliant
- UL & CSA Listed