MyCableMart_com

Your Home Theatre Connectivity Experts

6224 Bury Dr. Eden Prairie MN 55346 P. 952-486-8

HIGH-SPEED HDMI W/ETHERNET 28 AWG EXTENSION (M/F) CABLE, GOLD PLATED





Lengths Available: 6in, 1.5ft, 3ft, 6ft, 10ft, 15ft,			
Colors Available:			
Part Numbers this model:	HA-HXT28-6IN, FE-HXT28-01, HA-HXT28-03, HA-HXT28-06, FE-HXT28-10, HA-HXT28-15,		
Sales Category:	HDMI Extension	Wire Gauge (AWG):	28 AWG
Connector A:	HDMI Standard Type A Male	Specification:	
Connector B:	HDMI Standard Type A Female	Number Ports:	N/A
Export Tariff Code (HST):	8544422000	Transfer Rate:	
Feature / Style:		Images Length/Size Shown:	3 FT
# Positions:	80	Shielding:	Double Shielded
Convert From/To:		Туре:	

Extends an EXISTING HDMI Cable to connect any Blu-Ray player, Satellite Box, Cable Box, DVD Player, or ANY device accepting the standard HDMI connector. All our HDMI cables are manufactured to specific HDMI LLC standards and have passed stringent ATC testing requirements (see our certificates below).


Supports the following features that are included in the HDMI Version 1.4A Specification:

- 4K x 2K Support Supports ANY resolution to 4K (4096x2160)
- HDMI Ethernet Channel Delivers Ethernet data interconnectivity to compatible devices through the HDMI port so you don't need extra cables to get extended features
- Audio Return Channel (ARC)- Allows the HDMI connection between a television and A/V receiver to transmit audio two ways, both upstream and downstream. This eliminates the need for a separate audio cable ensuring the high digital audio quality of HDMI
- Full 3D Support If your source and receiving device support 3D, this cable will!
- Support for ANY TV refresh rates (such as 120Hz/240/480/600Hz) Click HERE for an explanation of refresh rate technology

Cable Specifications and Additional Features:

- CEC (Consumer Electronics Control), Auto Lip-Sync, Dolby TrueHD, and DTS-HD
- Wire Gauge: 28 AWG ?
- End Connector Dimension: 20.1mm W x 10.7mm H, Cable Thickness: 7.5mm
- High Speed bandwidth: 10.2 GigaBit/sec (Tested and Certified to ATC Specification)

- Gold Plated 1u (All 19 wires and Ground Shroud)
- 19 pin, Male to Male, Type A **MALE** Connector to a Type A **FEMALE** Connector
- Silver-tinned PURE copper wire for maximum conductivity without ANY harmful lead (RoHS)
- Triple Shielded, EMI (Foil, braid, foil)
- 100% Backward compatible with all previous HDMI versions
- No bulky ferrites cores! (Why not?) ?
- UL / CSA listed (UL File #: E119932, Style: 20276), Max Temperature: 80 degree C
- Fully HDMI LLC / ATC Certified (see certificates below)

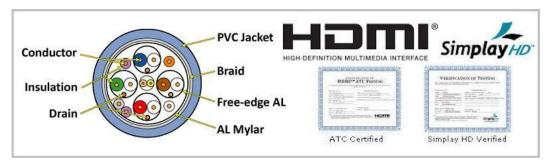

View <u>ATC Testing Certificate</u> issued by Silicon Images View <u>SimplayHD Verification of Testing Certificate</u> Manufactured by an <u>HDMI LLC Certified Adopter</u> (Pak Heng Technologies)