


## 3 METER ST/ST 10G MULTI-MODE DUPLEX OM3 50/125 FIBER OPTIC NETWORKING CABLE

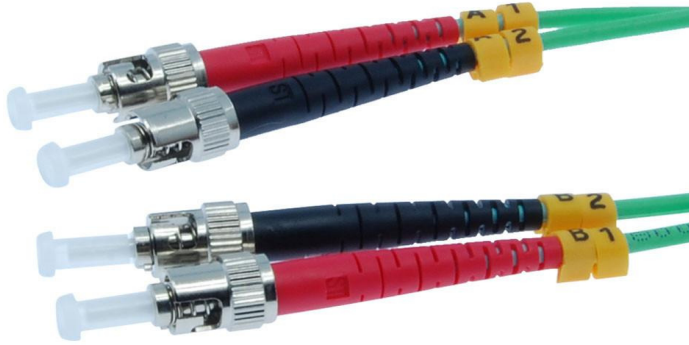

<b>Lengths Available:</b>	1m, 2m, 3m, 5m, 10m,		
<b>Colors Available:</b>			
<b>Part Numbers this model:</b>	BE-102646, BE-102647, <b>BE-102648</b> , BE-102649, BE-102650,		
<b>Sales Category:</b>	Fiber Optic Jumpers	<b>Wire Gauge (AWG):</b>	Not Specific / Not Applicable
<b>Connector A:</b>	Fiber Optic ST Connector	<b>Specification:</b>	
<b>Connector B:</b>	Fiber Optic ST Connector	<b>Number Ports:</b>	N/A
<b>Export Tariff Code (HST):</b>	8544422000	<b>Transfer Rate:</b>	
<b>Feature / Style:</b>		<b>Images Length/Size Shown:</b>	3 M
<b># Positions:</b>		<b>Shielding:</b>	
<b>Convert From/To:</b>		<b>Type:</b>	Multimode, OM3

Our OM3 fiber optic cables are constructed of high quality UPC polished ceramic ferrules and are 100% factory tested. Typically, 10 Gigabit applications are run on 9/125 Singlemode fibers, which require costly laser transceivers. By utilizing these fiber optic cables, users are able to implement high speed, low cost Multimode transceivers or VCSEL's (Vertical Cavity Surface Emitting Lasers) resulting in greater overall system cost savings.

### Features and Specifications:

- ST/ST (Straight Tip / Bayonet BNC)
- Multi-Mode Duplex (M/M)
- OM3, supporting up to 10 Gbit/Sec, 1000Base-SX
- Meet IEC 61754-2 standards
- Backward compatible to OM2
- 50/125 Micro fiber core (mm) and OD cable width with cladding
- Indicator rings for each identification at each end (A/B), Aqua