


MyCableMart.com

Your Home Theatre Connectivity Experts

6224 Bury Dr, Eden Prairie MN 55346 P. 952-486-8736

PREMIUM VGA MALE/MALE TRIPLE-SHIELDED CABLE W/FERRITES GOLD PLATED

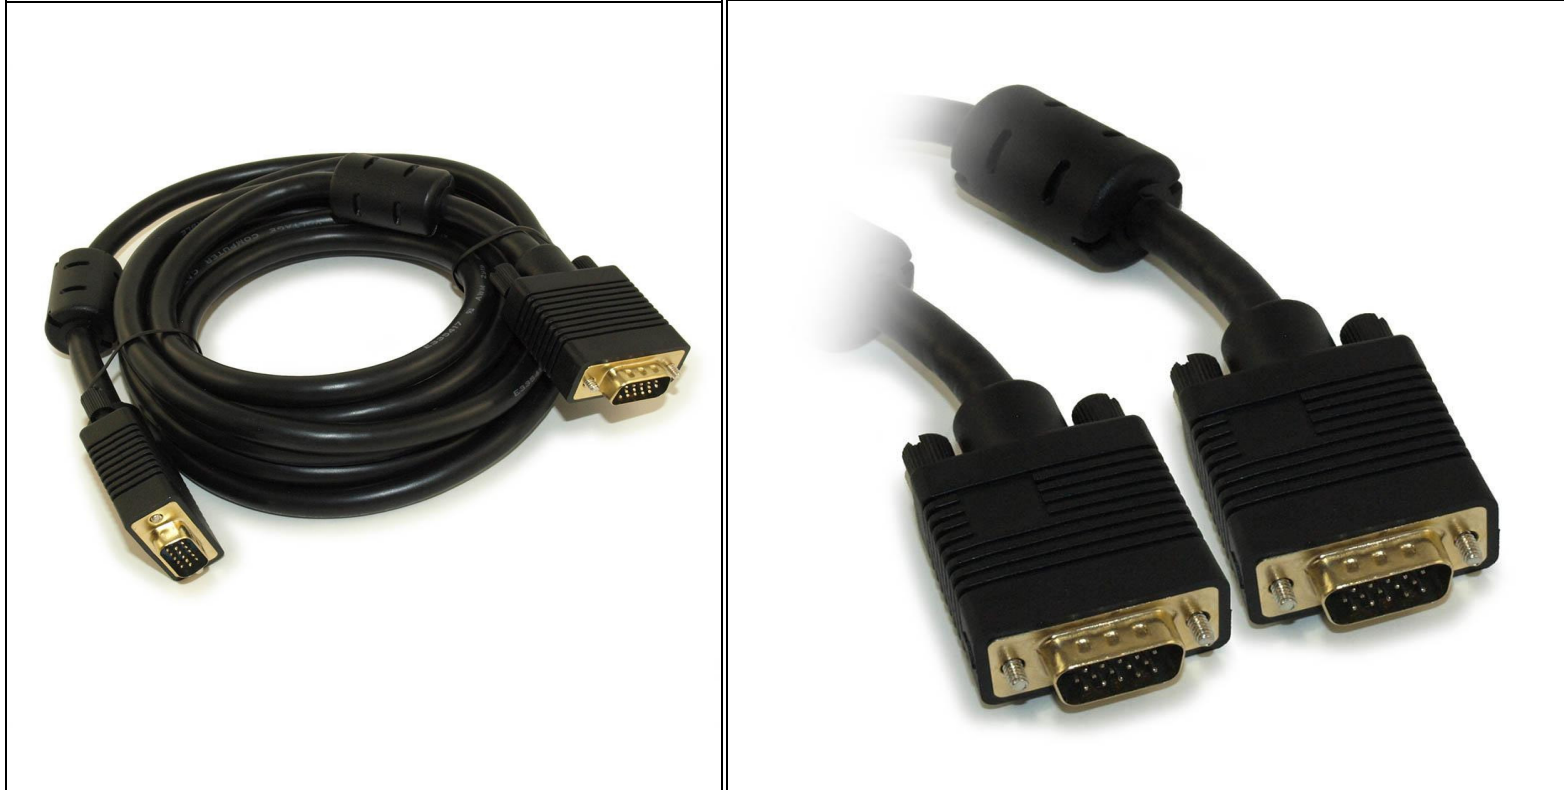

Lengths Available:	6in, 1.5ft, 3ft, 3ft, 6ft, 10ft, 25ft, 35ft, 50ft, 50ft, 50ft, 75ft, 100ft,		
Colors Available:			
Part Numbers this model:	FE-VGA-6IN, FE-VGA-01F, BE-180440, FE-VGA-03F, BE-180455, BE-180456 , FE-VGA-25F, FE-VGA-35F, HA-VGA-150F, FE-VGA-50F, MR-SVGAF-15MM, BE-180460, FE-VGA-100F,		
Sales Category:	VGA Cables & Adapters	Wire Gauge (AWG):	30 AWG
Connector A:	VGA HD15 Male	Specification:	
Connector B:	VGA HD15 Male	Number Ports:	N/A
Export Tariff Code (HST):	8544422000	Transfer Rate:	
Feature / Style:	Mono	Images Length/Size Shown:	10 FT
# Positions:	15	Shielding:	Shielded
Convert From/To:		Type:	HD15

This VGA Male/Male cable features a low loss, double shielded design. Signal integrity is further enhanced by ferrites cores that filters out noise. Comes with durable molded connectors with thumbscrews (at both male and female end) for a secure connection. Great for connecting high resolution analog displays. Comes with a lifetime warranty for peace of mind. 2 Male 15pin connections, VGA connections are also commonly referred to as HD15, DB15 (a misnomer), PC in/out, RGB and RGBHV. This is a FULLY PINNED, FULLY WIRED (15 wires) cable for full DDC2/E-DDC support.

Specifications:

- Supports all VGA monitors including analog flat panel display, high resolution desktop, CAD and graphic workstations.
- 2 MALE Connectors: Fully Pinned 15 male with thumb-bolts
- All 15 wires connected "straight through"
- Supports resolutions UP TO 2048X1536px @85 Hz (388 MHz). Max Resolution obtained may vary depending on signal strength and cable length.
- Wiring Connection: Wires/Pins 1, 2, 3: Coax; 6, 7, 8 G: straight through but also connected to drain (G); remainder of wires straight through
- Cable Outer Diameter (OD): 8.5mm
- Min Bend Radius: 127.5mm
- Conductors: 28AWG , Drain Wire: 30AWG (Copper)
- Triple shielded for maximum graphics performance preventing signal loss, screen ghosting & loss of color
- DDC2/E-DDC Data Support (for monitor detection by OS)
- Gold Plated Connectors
- Have matched impedance w/PVC jacket
- Ferrite cores (both ends)
- Color: Black