

Flat Panel TV Cable Organizer Kit with Duplex Surge Power Solution 50-8823-WH-KIT



DataComm Electronics, Inc.
888.223.7977 / 770.662.8205 / www.DataCommCableOrganizer.com




DataComm Electronics' easy-to-install Flat Panel TV Cable Organizer Kit with Duplex Surge Power Solution is used to install power and hide unwanted audio/video (A/V) cables in the wall behind your HDTV, your amplifier and other audio/video devices. This power relocation kit allows you to pass low voltage cables and power through the wall with surge protection, creating a professional, clean look for your home theater.

THIS KIT INCLUDES:

- Recessed Low Voltage Mid-Size Plate
- Recessed Low Voltage Cable Plate with Straight Blade Inlet
- Two (2) Electrical Outlet Boxes
- Four (4) Screws per Outlet Box
- 15 Amp/125 Volt Duplex Surge Suppressor
- Three (3) Wire Nuts
- 6 Ft. 16/2 with Ground Cord Set with 360° Rotating Flat Head
- 8 Ft. Electrical Wire-Romex


FEATURES

- Works with the industry's the thinnest mounts and HDTV's.
- 15 Amp/125 Volt duplex surge suppressor allows power to be installed behind an HDTV or other similar applications with surge protection.
- Conceal multiple low voltage cables behind your HDTV.
- Metal mounting wings are attached to the media plate and fasten tightly against the back of the wall. No low voltage mounting plate necessary.
- Flexible screen closes the interior opening of the Mid-Size Plate and Straight Blade Inlet (see picture to right).
- Female end of extension cord is recessed completely into the wall when plugged into the Straight Blade Inlet.
- Male end of extension cord has a 360° rotating flat head for easy access to any outlet.
- Included Electrical Wire-Romex connects easily to the recessed cable plates for power relocation eliminating the need for an electrician.
- Minimum Order 1; Master Carton 4.

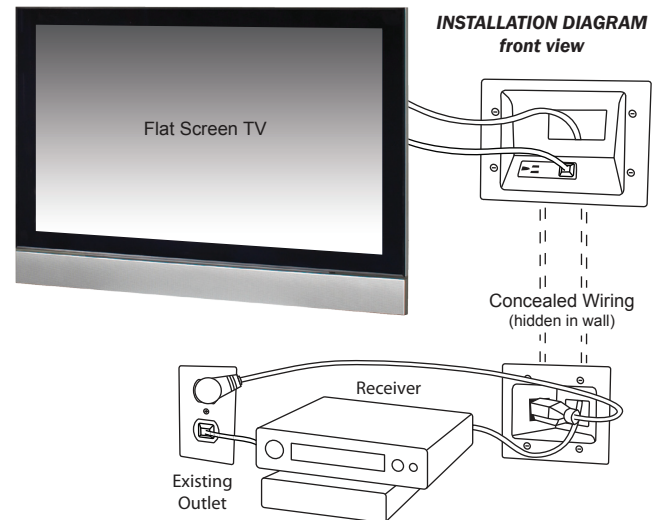

Flexible Screen closes interior opening of the Mid-Size Plate and Straight Blade Inlet

Top View - Mounted Between Studs

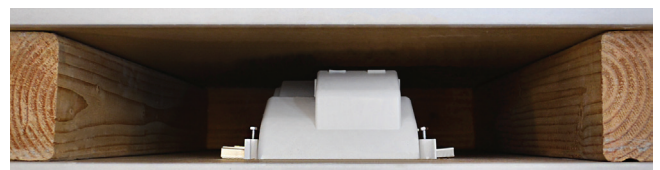

RoHS Compliant

This product is patent protected by U.S. Patent numbers:
D553475, D554475, and 7390964.

The Receptacle is an UR, UL Recognized Component