


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
------	-----------	-------------	-------------------

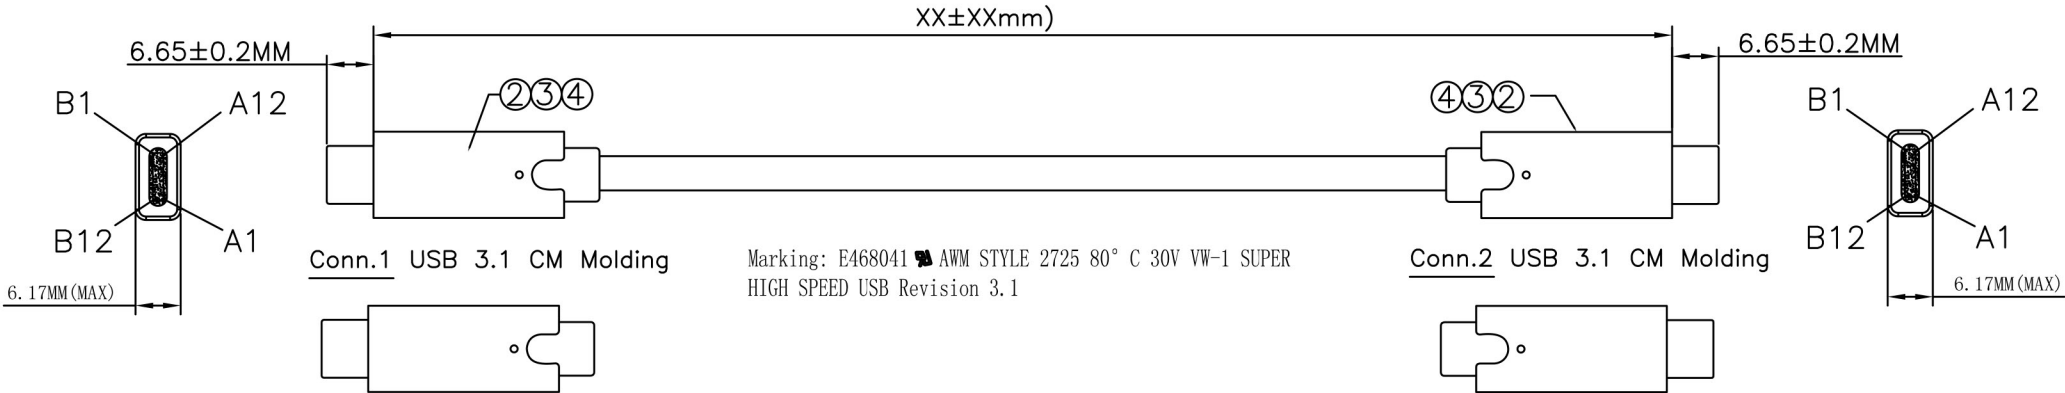

Marking: E468041 AWM STYLE 2725 80° C 30V VW-1 SUPER  
HIGH SPEED USB Revision 3.1

150185	1FT(305±10MM)
150186	3FT(915±15MM)
150187	6FT(1830±30MM)

Pin Assignment

Conn.1				Conn.2			
A1	B1	A12	B12	A1	B1	A12	B12
A4	B4	A9	B9	A4	B4	A9	B9
A5				A5			
B5				B5			
A6				A6			
A7				A7			
A2				B11			
A3				B10			
B11				A2			
B10				A3			
B2				A11			
B3				A10			
A11				B2			
A10				B3			
A8				B8			
B8				A8			
Shell				Shell			

Electrical Test:

1. 100%Test(Open, short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi—pot:300V DC/10ms

transmission speed:10GB/S(MAX)

4	45P PVC BLACK	1	PCS
3	PE	1	PCS
2	USB3.1 (C) M Solder Type Shell Nickel, ecru Insulation	1	PCS
1	UL2725 (32# (7/0. 08T) *1P+D (7/0. 08T) +AL+MY) *4P+32# (7/0. 08T) *1P+32# (7/0. 08T) *4C+22# (65/0. 08T) *2C+F+AB (16/9/0. 08T) OD:4. 5MM BLACK	XX	m
NO	DESCRIPTION	Q'TY	UNIT

Unless specified on the drawing,  
tolerances are per the follows:  
.  
.X  
.xx

+1  
+0.2  
+0.05

MY CABLE MART, LLC (AUTHORIZED DISTRIBUTOR)

DRAWN BY	DATE: 2017.5.28	DESCRIPTION: USB 3.1 Type C Male TO Type C Male	
CHECKED BY	SHEET 1 of 2	ITEM NO.	1501XX
APPROVED BY	SCALE 1:1	REV. 00	UNIT:mm