


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

| REVISION INFORMATION | | | |
|----------------------|-----------|-------------|-------------------|
| Rev. | Rev. Date | Modified By | Brief Description |
| | | | |

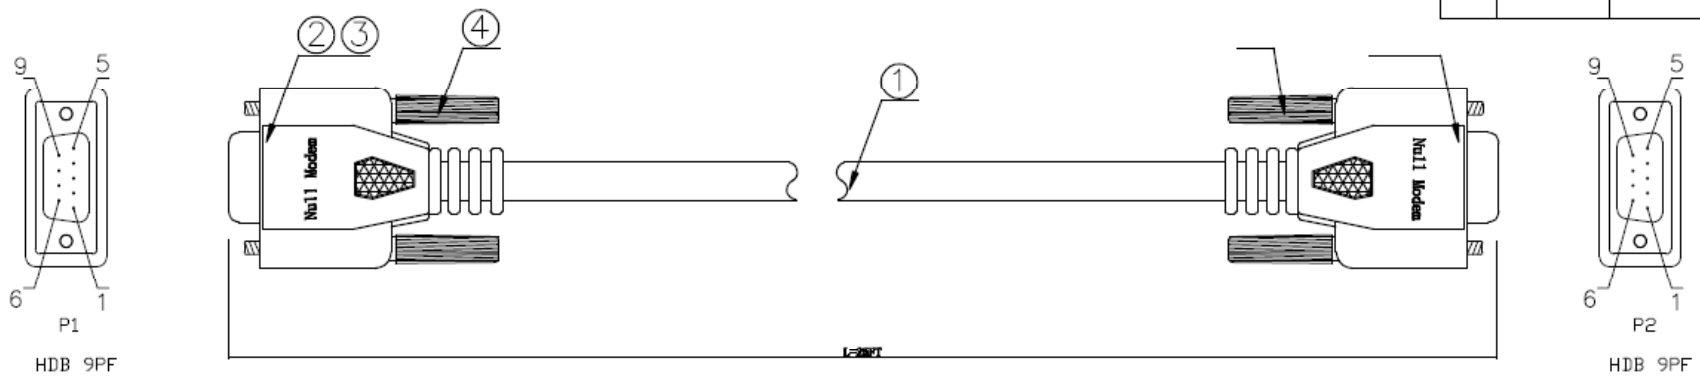

Line a table

| P1 | P2 |
|-----|-----|
| 1&6 | 4 |
| 2 | 3 |
| 3 | 2 |
| 4 | 1&6 |
| 5 | 5 |
| 7 | 8 |
| 8 | 7 |
| G | G |

- 1. red
- 2. white
- 3. green
- 4. black
- 5. blue
- 6. yellow
- 7. orange
- 8. gray

Technical requirements

1 electrical characteristics:
 Electrical testing should be finished 1.1, cannot have short circuit breakers, intermittent contact, insulation, dislocation, contact resistance and electrical adverse circumstances.

1.2 electrical test conditions
 Ω conduction impedance: 10
 Insulation resistance: Ω 10M / 300V

2 appearance requirements:
 There can be no external formwork 2.1, full mould flow lines and shrink wait for a phenomenon.

2.2 wire surface clean, smooth, do not have clear off color and scratches.

Do not have 230 terminals oxidation and electric plating falls off phenomenon.

Packing:

3. Blank PE bag + TAB, a single round packaging.

1). Material List :

| NO. | PART NAME | SPECIFICATION DESCRIPTION | QTY | UNIT |
|-----|----------------|---|-----|------|
| ⑤ | SCREW | 230 * 42CM txiki color screw stem | 4 | PCS |
| ④ | Outer Moulding | 45P PVC black color plugs | NA | KG |
| ③ | Connector | DB 9PF two rows of blue iron shell plating nickel | 1 | PCS |
| ② | Connector | DB 9PF two rows of blue iron shell plating nickel | 1 | PCS |
| ① | Wire | 25C+1 IVORY | 10 | ft |

My Cable Mart LLC

| | | |
|-------------|---------------------|------------------------------------|
| DRAWN BY | DATE: 2012-11-14 | DESCRIPTION: 25FT DB9F/F |
| CHECKED BY | SHEET 1 of 1 | ITEM NO. 180233 |
| APPROVED BY | SCALE 1:1 | REV. 00 UNIT: mm |