



REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

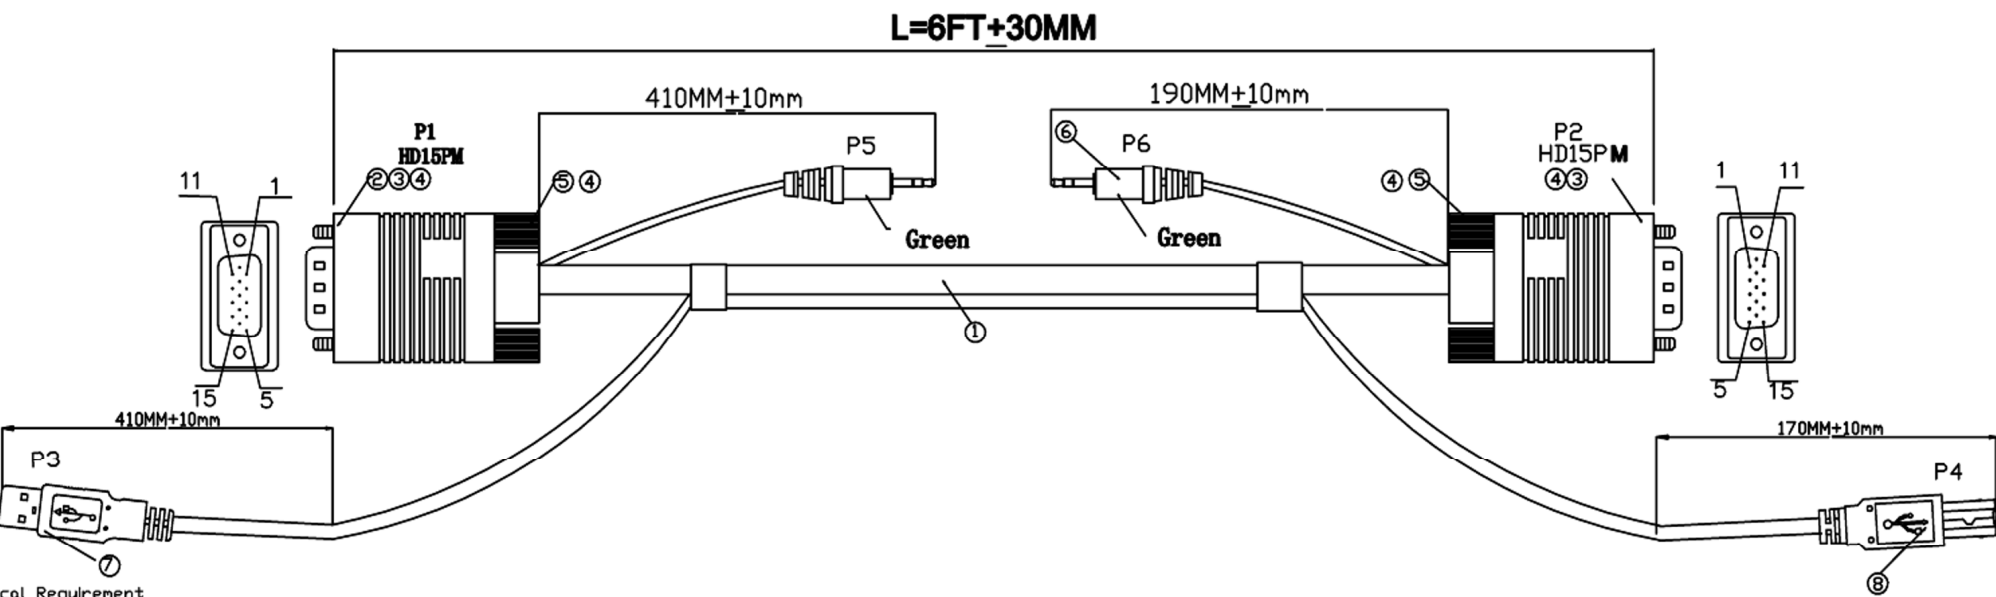

- Electrical Requirement:
- Electronical:
- 1.1 Cable must do electric?no short?
no open?no insulation inadequate
misalignment?contact resistance too big
 - 1.2 Electric test condition
Resistance: ≤10?
Stripline: 10MΩ/300VDC
- Appearance request:
- 2.1 External mold no shrink
 - 2.2 Wire surface, clear printing? smooth, no scratch and color difference
 - 2.3 Terminals should not be oxidized or plating layer drop
- Size request:
- 3.1 Product conform to drawing
 - 3.2 ▲Size will be checked by QC
- Wire
- See the linear epitope
- Routing:
- Single round turn
- Material List :

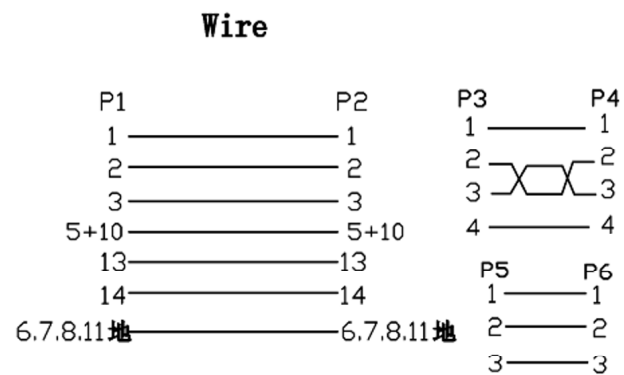

PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
Connector	USB 2.0 BM	1	PCS
Connector	USB 2.0 AM	1	PCS
Connector	DC 3.5	2	PCS
SCREW	Screw 2.3*42MM	4	PCS
Outer Molding	45P PVC(ROHS)	NA	KG
PE	PE Internal Mold Material	NA	KG
Connector	HD15PM Blue Bobbin Nickel-Plated	2	PCS
Wire	[(30AWG*3C+D)+7/0.10CCS*9C]*1C+[30AWG*1P+30AWG*2C]*1C	6	ft

DRAWN BY		DATE:	DESCRIPTION:
CHECKED BY		2012/04/06	KVM
APPROVED BY		SHEET 1 of 1	ITEM NO.190227
SCALE 1:1		REV. 00	UNIT: mm