




NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
	2016-01-16	zhang	Mark cable

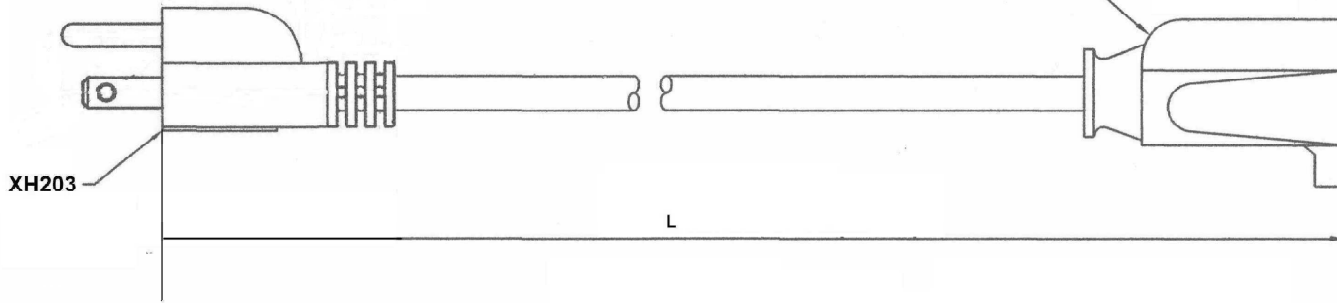

XH203-Z
XUANHUA
E257089

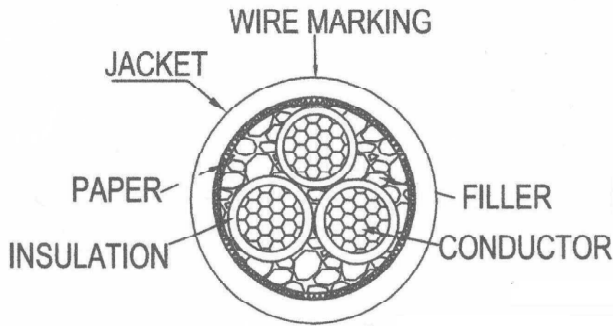

WIRE MARKING: (Hollow)		UL c(UL) SJT3C 16 AWG(1.31mm ²) 60C VW-1 300V E313867 100030-765 FT1 NINGBO XUANHUA					
Conductor		Insulation			Jacket		Overall diameter
AWG		Min.Thick	Diameter	Length of Lay	Min.Thick	AVG.Thick	
16AWG 26/0.25						0.76mm	8.6±0.2mm

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)

My Cable Mart

Item No	Length (ft)	T (inche)
210159BK	1	±0.79
210160BK	3	±0.79
210321BK	6	±0.79
210322BK	10	±0.79
210323BK	15	±0.79
210324BK	25	±0.79

DRAWN BY: FENG	DATE: 2016-01-21	DESCRIPTION: POWER CORD 5-15P TO 5-15R BLACK SJT 16/3
CHECKED BY: ZHANG	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00
	UNIT: mm	