
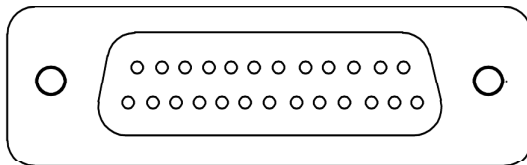
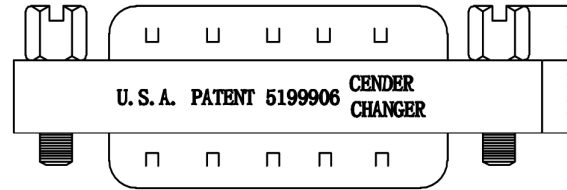
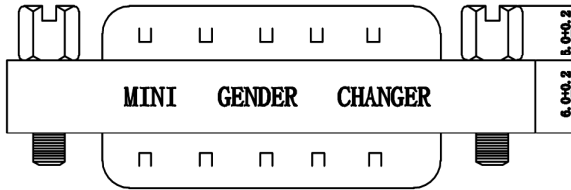



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

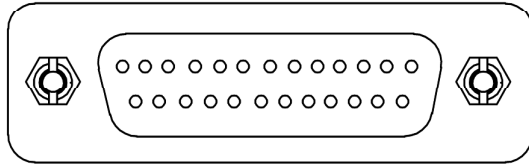

Label: Yellow color with black character  
 One Side: U S A PATENT 5199906 GENDER CHANGER  
 Insulator: PBT Glass fibre reinforced UL94-V0  
 Contact: Brass  
 Contact Plating: Gold Plated over Nickel  
 Shell: Tin Rating: 3AMP  
 Electrical Strength: 1000V AC for one minute  
 Insulator Resistance: 1000M ohm Min. at 500V DC  
 Temperature: -55° C +105° C

# My Cable Mart

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				

DRAWN BY	DATE: 2011/12/31	DESCRIPTION: DB25 M/M 转接头
CHECKED BY	SHEET 1 of 1	ITEM NO. 271005
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm