


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
1.0	2016/04/11	Pillar	Add labels on packaging
2.0	2019/06/03	Panther	Revise Warning Lable

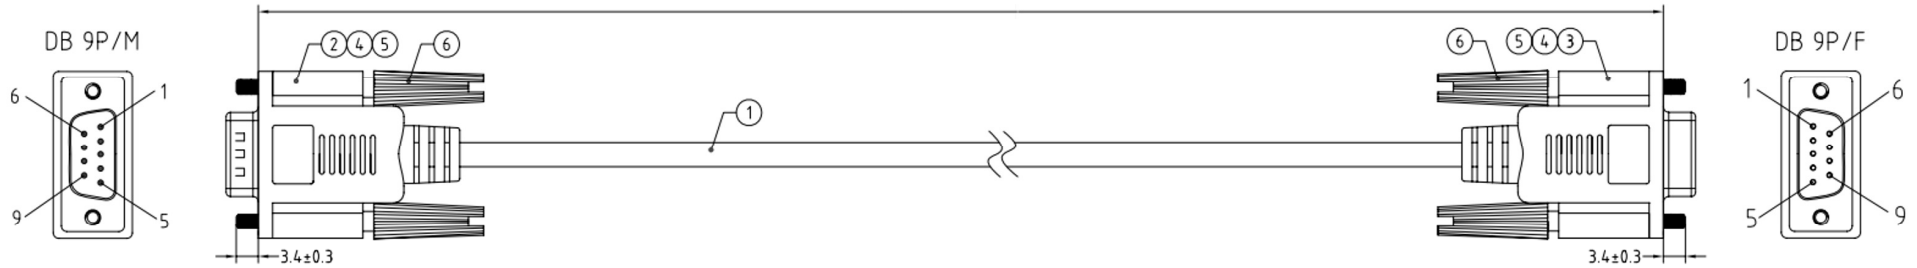

Electrical character:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC 300V AT 10ms.
- 3)Insulation resistance:5M Ohm(min)
- 4)Conductive resistance:5 Ohm(max)

Wire Details

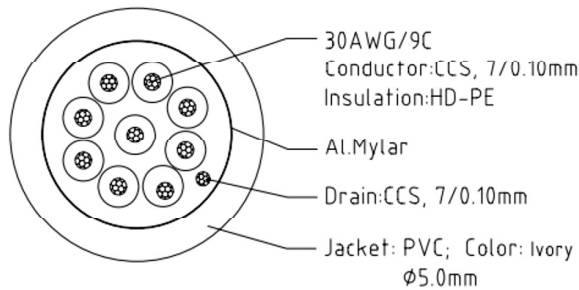

PIN ASSIGNMENT:

DB 9P/M		DB 9P/F	
1	red	1	red
2	green	2	green
3	blue	3	blue
4	brown	4	brown
5	orange	5	orange
6	yellow	6	yellow
7	purple	7	purple
8	grey	8	grey
9	black	9	black
SHELL	drain	SHELL	drain

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①	Cable	30#(7/0,10CCS)*9C+D+A+PVC,Ivory,OD5,0mm		
②	Conn	DB 9P/M,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type		
③	Conn	DB 9P/F,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type		
④	Innermold	PE,Low density		
⑤	Overmold	PVC,45Pa,Ivory		
⑥	Thumbscrew	#4-40UNC,Ø4.0*L37,4mm,Nickel Plated,Molding PVC(Ivory)		

Unless specified on the drawing, tolerances are per the follows:

.	+1
.x	+0.2
.xx	+0.05

My Cable Mart

DRAWN BY	DATE: 2019/06/03	DESCRIPTION: DB 9P M TO F Serial Cable	
CHECKED BY	SHEET 1of2	ITEM NO. 180224	
APPROVED BY	SCALE None	REV. 2.0	UNIT:mm

