


Pin Assignment

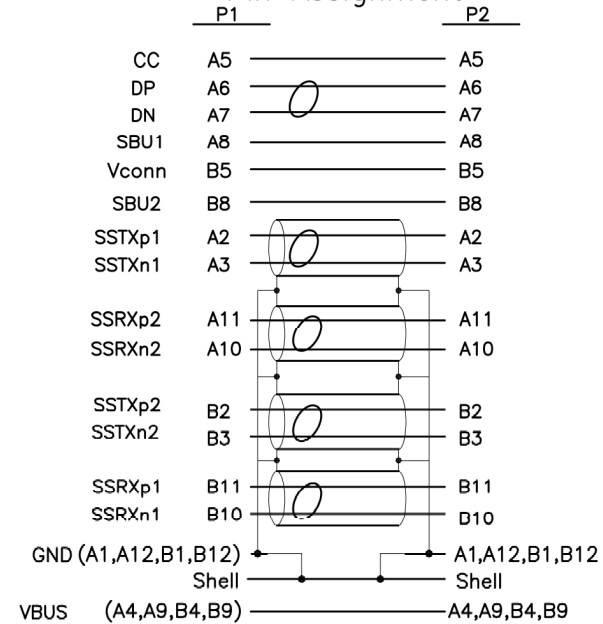

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:300V DC/10ms

L	P/N
915±20MM	10UC-CDP4K60-03
1830±30MM	10UC-CDP4K60-06
3050±50MM	10UC-CDP4K60-10

Resolution: 4K*2K@60Hz

NO	DESCRIPTION	Q'TY	UNIT	TOLERANCE			My Cable Mart			
				INCHES	M/M	INCHES	M/M			
6	Transparent PE	3	g	.X	.015	.30	TITLE: P			
5	45P PVC Color: Black	12	g	.XX	.010	.10	CUSTOMFR :			
4	DP M ABS SHELL Color: Black	1	pcs	.XXX	.005	.05	CUSTOMER P/N :			
3	USB3.1 C Type Connector With PCB SHELL Gold Plated	1	pcs	DRAWN BY			SCALE	NONE	DRAWING NO.:	REV. A01
2	UTCDP-6FT(VIA) With PCB SHELL Gold Plated	1	pcs	CHECK BY			UNIT	MM		
1		L	m	APPD BY			DATE	2018.05.04	1/2	