




Part #	Length	Weight
P-HD 24-16-M	16'	2 lbs
P-HD 24-25-M	25'	2.5 lbs
P-HD 24-35-M	35'	3 lbs
P-HD 24-50-M	50'	5 lbs
P-HD 24-75-M	75'	7lbs

PLENUM HDMI CABLE

Standard HDMI Cable with Ethernet - Certified up to 40ft.

Technical Specifications

- Low Smoke PVC outer jacket and FEP
- Support up to 1080p resolution
- Support all digital audio formats including Dolby TrueHD and DTS-HD Master Audio
- Support for Audio Return Channel
- 24k Gold plated connectors
- 24AWG Stranded Copper
- RoHS Compliant

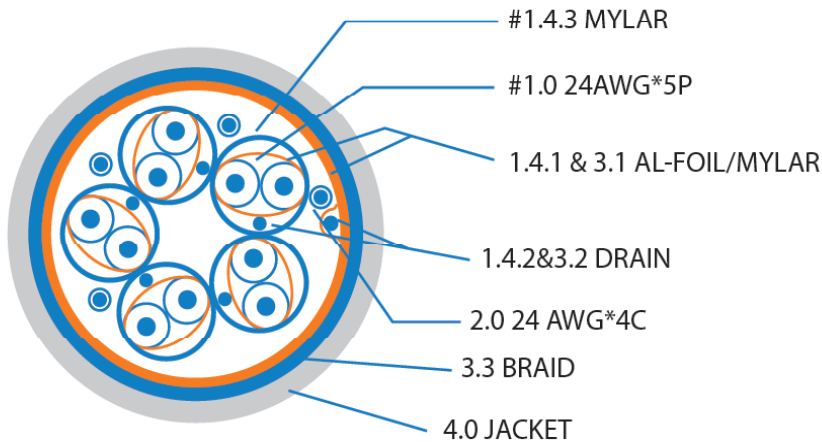

Construction

24AWG*5P+24AWG*4C - HDMI Plenum Cable with Ethernet.

- 1.0 - Conductor: 24 AWG*5P cable
24 (7/32)AWG Bare stranded copper.
 - 1.1 - Insulation:
 - 1.1.1 - Material: foam-FEP.
 - 1.1.2 - O.D: .06", Nominal
 - 1.2 - Pairing: 2 Insulated conductors twisted together.
 - 1.3 - Color Code: Blue/White.
 - 1.4 - Shield:
 - 1.4.1 - Aluminum- foil/mylar, overlap 25%min.
 - 1.4.2 - Drain: 24AWG bare stranded copper
 - 1.4.3 - Mylar tape, overlap 25%min.
 Color Code: Blue, Orange, Green, Red, Transparent
- 2.0 - Conductor: 24 AWG*4C
24 (7/32)AWG Bare stranded copper.
 - 2.1 Insulation:
 - 2.1.1 - Material: FEP
 - 2.1.2 - O.D: 0.035", Nominal
 - 2.2 Color Code: Black, Green, Brown, Blue
- 3.0 - Shield
 - 3.1 Aluminum foil/mylar, overlap 25%min.
 - 3.2 Drain: 24 (7/32)AWG bare stranded copper
 - 3.3 36AWG tinned copper braid, 80% min. coverage.
- 4.0 - Jacket
 - 4.1 Material: PVC Alloy
 - 4.2 O.D: 0.413", Nominal
 - 4.3 Color: Covid Blue
 - 4.4 Marking: (White Print)