


PIN ASSIGNMENT:

P1:	1	2
P2:	1	2

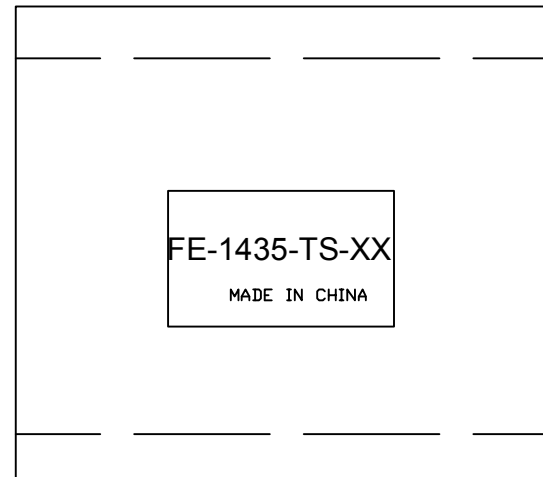

NOTES:


- 1.100% OPEN & SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

CUSTOMER P/N	LENGTH
FE-1435-TS-01	450(1.5FT)±30MM
FE-1435-TS-03	905(3FT)±30MM
FE-1435-TS-06	1830(6FT)±50MM
FE-1435-TS-10	3050(10FT)±80MM
FE-1435-TS-15	4570(15FT)±100MM
FE-1435-TS-25	7620(25FT)±150MM
FE-1435-TS-50	15240(50FT)±200MM

MY CABLE MART LLC

NO.	Material	Description
4	Mold jacket	PCV45Pa BLACK
3	connector	6.35MM MONO PLUG NICKEL
2	connector	3.5MM MONO PLUG NICKEL
1	Cable wiring	28AWG(10/0.1BC)*1C+S(28/0.1CCS) OD: 5.0mm PVC BLACK

Title:
3.5MM MONO TO 6.35 MONO CABLE



Customer: MY CABLE MART LLC

Page: 1/1

Drawn BY: CLR

Customer P/N:

REV: A

Check BY: DYH

Date: 2020.01.14

Drawing NO.:

Unit: mm

Appd BY: