
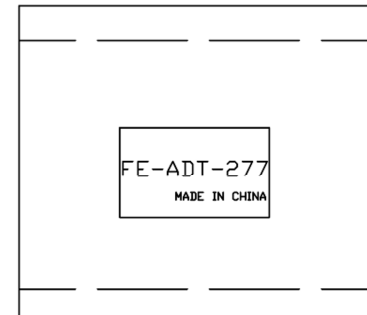


PIN ASSIGNMENT:

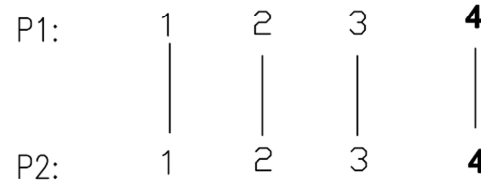


NOTES:

- 1.100%OPEN&SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

8		
7		
6		PE BAG+LABEL
5		Molded PCV45Pa Black
4		Molded PE Material
3		3.5MM 4 Conductor F
2		3.5MM 4 Conductor M
1		4C 30AWG VARNISHED WIRE OD:1.5MM
NO.	Material	Description

My Cable Mart, LLC

Title: **3.5mm 4 Conductor M/F adapter**



Customer: MY CABLE MART LLC

Page: 1/1

Drawn BY: **CLR**

Customer P/N: FE-ADT-277

REV: **A**

Check BY: **DYH**

Date: 2015.07.01

Drawing NO.:

Unit: **mm**

Appd BY: