


PIN OUT:

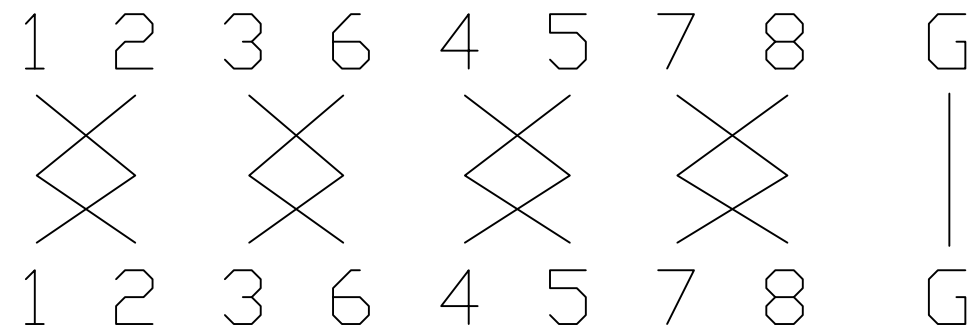

NOTES:

1. 100% OPEN & SHORT TESTING
2. VOLTAGE: 300V DC
3. INSULATION RESISTANCE: 20M ohm
4. CONTACT RESISTANCE: 1ohm
5. Operating temperature range: 0-50°C

CUSTOMER P/N	length
FE-ADT-289	1FT(305MM±30MM)
	7.5IN(190MM±30MM)

8		
7		
6		
5		PE BAG+LABEL
4		PCV45Pa GRAY
3		RJ45 FEMALE SHIELDED
2		RJ45 MALE SHIELDED
1		CAT.5e FTP CABLE 24AWG(7/0.18CU)*4P+AL+D(1/0.25CCA) OD: 5.5MM GRAY
NO.	Material	Description

MY CABLE MART LLC

Title: CAT.5e FTP RJ45 PLUG TO JACK			
Customer: MY CABLE MART LLC		Page: 1/1	Drawn BY: CLR
Customer P/N: FE-ADT-289		REV: A1	Check BY: DYH
Date: 2016.08.15	Drawing NO.: FLUF02	Unit: mm	Appd BY: