


PIN ASSIGNMENT:

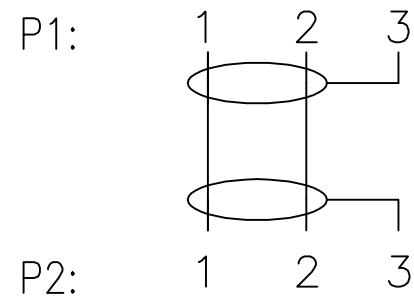

NOTES:


1. 100% OPEN & SHORT TESTING
2. VOL TAGE:300V DC
3. INSULATION RESISTANCE:20M ohm

| CUSTOMER P/N | length |
|----------------|------------------------|
| FE-ECTRS-03MM | 3<FT>905MM ± 30MM |
| FE-ECTRS-06MM | 6<FT>1830MM ± 30MM |
| FE-ECTRS-10MM | 10<FT>3050MM ± 50MM |
| FE-ECTRS-15MM | 15<FT>4570MM ± 80MM |
| FE-ECTRS-25MM | 25<FT>7620MM ± 100MM |
| FE-ECTRS-50MM | 50<FT>15240MM ± 100MM |
| FE-ECTRS-100MM | 100<FT>30500MM ± 150MM |

FECH Electronic Limited

Title:

1/4 Inch STEREO MALE TO MALE



Customer: MY CABLE MART LLC

Page: 1/1

Drawn BY: CLR

Customer P/N:

REV: A

Check BY: DYH

Date: 2018.09.21

Drawing NO.: FVSM01

Unit: mm

Appd BY:

| NO. | Material | Description |
|-----|----------|---|
| 8 | | |
| 7 | | |
| 6 | | |
| 5 | | |
| 4 | | |
| 3 | | PCV45Pa BLACK |
| 2 | | 1/4 STEREO MALE |
| 1 | | CABLE (10/0.1)*2C+S28/0.1 OD: 5.0mm BLACK |