


PIN ASSIGNMENT:

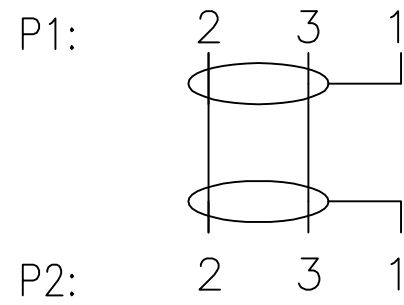

NOTES:

1. 100% OPEN & SHORT TESTING
2. VOL TAGE:300V DC
3. INSULATION RESISTANCE:20M ohm

CUSTOMER P/N	length
FE-ECXLR-03MF	3<FT>905MM ± 30MM
FE-ECXLR-06MF	6<FT>1830MM ± 30MM
FE-ECXLR-10MF	10<FT>3050MM ± 50MM
FE-ECXLR-15MF	15<FT>4570MM ± 80MM
FE-ECXLR-25MF	25<FT>7620MM ± 100MM
FE-ECXLR-50MF	50<FT>15240MM ± 150MM
FE-ECXLR-100MF	100<FT>304800MM ± 200MM

8		
7		
6		
5		
4		
3		XLR 3P MALE
2		XLR 3P FEMALE
1		CABLE (15/0.1)*2C+S28/0.1BC OD:6.0mm BLACK
NO.	Material	Description

**FECH Electronic Limited**

Title: <b>XLR 3P MALE TO FEMALE</b>			
Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: <b>CLR</b>	
Customer P/N:	REV: <b>A</b>	Check BY: <b>DYH</b>	
Date: 2018.08.29	Drawing NO.: FXLR02	Unit: <b>mm</b>	Appd BY: