

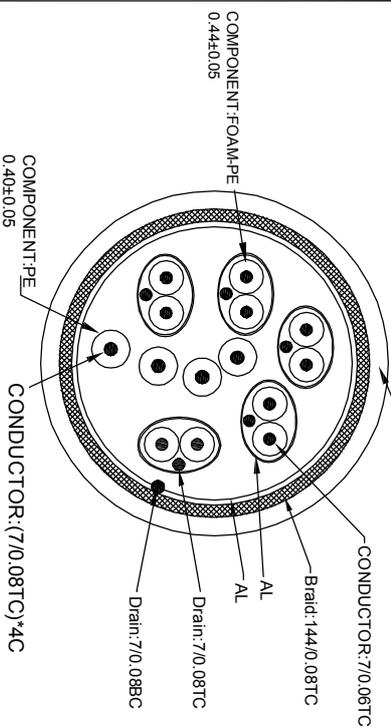


P1

150(61IN)±20mm

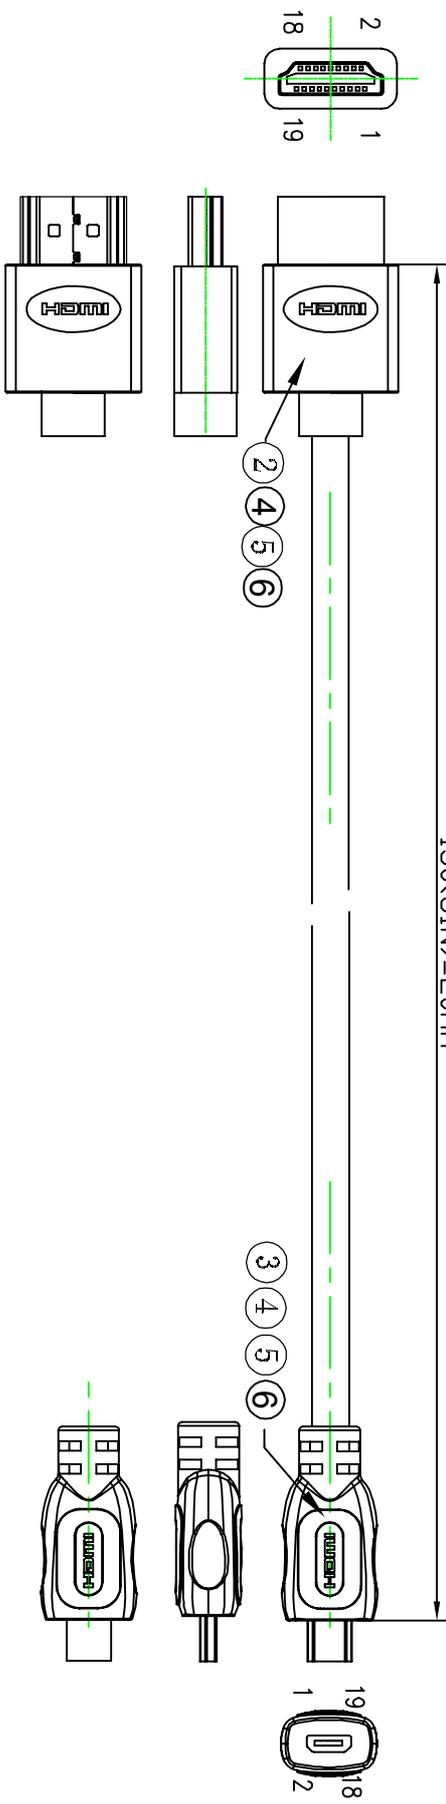

PIN ASSIGNMENT:

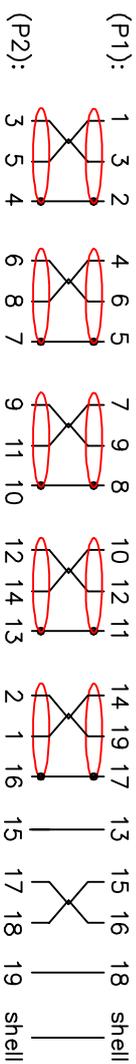

34AWG

NOTES:

1. 100% OPEN/SHOT TEST
2. CONDUCTIVE RESISTANCE : 5 Ohms MAX
3. INSULATION RESISTANCE : 10M Ohms MIN
4. HI-POT : 300V DC/10ms
5. The product is ROHS compliant.

料号:

NO.	PARTS NAME	SPECIFICATION STANDARD	QTY
⑥	OUTSIDE MOULD	PVC BLACK(45P) MOLDED	/
⑤	INSIDE MOULD	PE MOLDED	/
④	WIRE CLIP	Two-piece stand 34 bare-wire version 2.0v	2PCS
③	HDMI D/M	HDMI TYPE D MALE GOLD	1PCS
②	HDMI A/M	HDMI TYPE A MALE GOLD	1PCS
①	CABLE	HDMI2.0 34#(7/0.06TC*1P+7/0.08TC PB0.44+AL)*4C+(7/0.06TC*1P+7/0.08TC+AL+HD)+(7/0.08TC+PE)*4C+AL+HD 7/0.088C+144/0.08TC OD=4.5mm PVC BLACK	1PCS

APPROVE CHECK DRAW

DATE: 2023.04.28

DESCRIPTION

FE-HHHD34-61N

HDMI 2.0V CABLE

AM-DM 4K@60HZ

Li you Liang

FE-HHHD34-61N

FHHHD34

MM

UNIT

mm

SIZE

A0

**MY CABLE MART INC**