


P1

P2

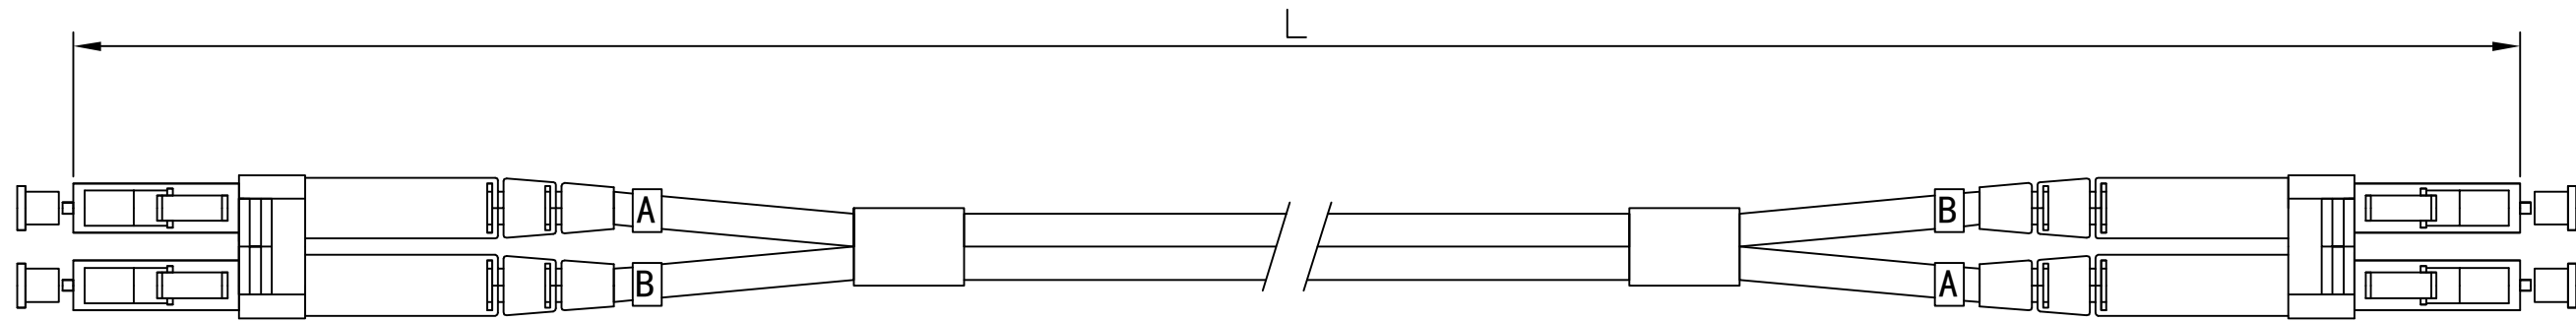

performance:

1. insertion loss: < 0.3dB
2. Echo loss: ≥ 50dB
3. Extensibility: $-0.05\mu\text{m} < H < 0.05\mu\text{m}$
4. Rayon radius: $7 < R < 20\text{mm}$
5. Apex offset: < 50um

CUSTOMER P/N	length
FE-LCLCM-01M	1000MM ± 30MM
FE-LCLCM-02M	2000MM ± 30MM
FE-LCLCM-03M	3000MM ± 50MM
FE-LCLCM-04M	4000MM ± 50MM
FE-LCLCM-05M	5000MM ± 80MM
FE-LCLCM-06M	6000MM ± 80MM
FE-LCLCM-08M	8000MM ± 100MM
FE-LCLCM-10M	10000MM ± 100MM
FE-LCLCM-15M	15000MM ± 100MM

MY CABLE MART LLC

NO.	Material	Description
2		LC/10G Multi-Mode Duplex OM3
1		Fiber Optic : OD3.0MM Duplex 10G Multi-Mode OM3 50/125 Fiber Optic CABLE PVC JACK AQUA

Title: LC/LC 10G Multi-Mode Duplex OM3 50/125 Fiber Optic			
Customer: MY CABLE MART LLC		Page:1/1	Drawn BY:CLR
Customer P/N:		REV:A	Check BY:DYH
Date:2017.12.06	Drawing NO.: FFLL21	Unit:mm	Appd BY: