

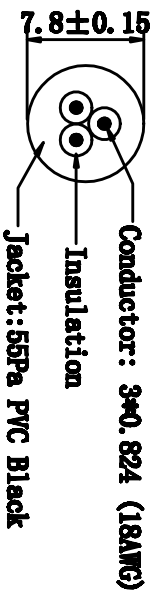


(UL) TYPE SJTW 3X0.824mm² (18AWG) 105°C 300V VW-1 E256833

HENGLIDE C(UL) TYPE SJTW 3X0.824mm² (18AWG) 105°C 300V FT2 LF



PIN ASSIGNMENT:

P1	P2
L	L brown
N	N blue
E	E (Yellow / Green)


NOTES:

1. 100%OPEN&SHORT TESTING
2. VOLTAGE: AC ≈ 1500V
3. INSULATION RESISTANCE: 20M ohm

PART NO.	LENGTH
FE-PWR-01	305 (1FT) ± 20MM
FE-PWR-02	610 (2FT) ± 20MM
FE-PWR-03	905 (3FT) ± 30MM
FE-PWR-04	1220 (4FT) ± 30MM
FE-PWR-05	1525 (5FT) ± 50MM
FE-PWR-06	1830 (6FT) ± 50MM
FE-PWR-08	2440 (8FT) ± 50MM
FE-PWR-10	3050 (10FT) ± 80MM
FE-PWR-12	3660 (12FT) ± 80MM
FE-PWR-15	4570 (15FT) ± 80MM
FE-PWR-25	7620 (25FT) ± 100MM

MTY CABLES MARKT LLC

Title: **US Mains Plug TO 10A C13 Socket Power Cable**



8	
7	
6	
5	
4	Outer Jacket: 45Pa PVC BLACK
3	10A C13 IEC Socket
2	US Mains Plug (NEMA 5-15P)
1	(UL) TYPE SJTW 3X0.824mm ² (18AWG) OD: 7.8MM BLACK
NO.	Material Description

Customer:	Title: US Mains Plug TO 10A C13 Socket Power Cable		
Customer P/N:	Page: 1/1	Drawn BY: CLR	Check BY: DYH
Date: 2016.07.15	Drawing NO.: FPA12	Unit:mm	Appd BY: