




PIN ASSIGNMENT:

P1:	1	2	3
P2:	1	2	3

NOTES:

- 1.100% OPEN&SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

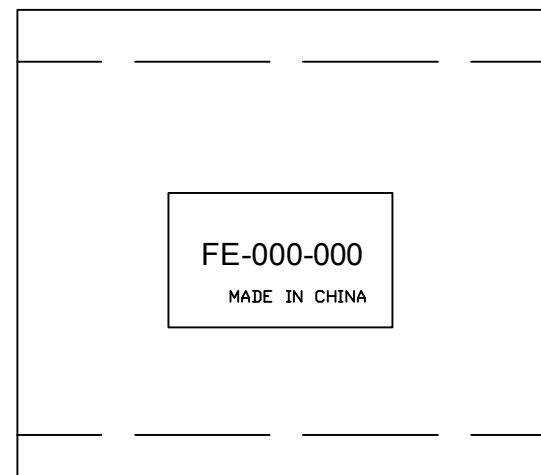

PART NO.	LENGTH
FE-PX3MM-MF-6IN	150(6IN)±20MM
FE-PX3MM-MF-01	450(1.5FT)±20MM
FE-PX3MM-MF-02	600(2FT)±20MM
FE-PX3MM-MF-03	910(3FT)±30MM
FE-PX3MM-MF-06	1830(6FT)±50MM
FE-PX3MM-MF-10	3050(10FT)±50MM
FE-PX3MM-MF-12	3660(12FT)±80MM
FE-PX3MM-MF-15	4570(15FT)±80MM
FE-PX3MM-MF-20	6100(20FT)±100MM
FE-PX3MM-MF-25	7620(25FT)±120MM
FE-PX3MM-MF-35	10670(35FT)±150MM
FE-PX3MM-MF-50	15240(50FT)±200MM
FE-PX3MM-MF-75	22860(75FT)±200MM
FE-PX3MM-MF-100	30480(100FT)±200MM

8		
7		
6		PCV45Pa BLACK
5		3.5MM JACK Copper Metal Housing
4		3.5MM PLUG Copper Metal Housing
3		3.5MM STEREO JACK Gold
2		3.5MM STEREO PLUG Gold
1		24AWG(7/0.2BC)*2C + AL + B(32*0.1BC) OD: 4.0mm BLACK PVC JACKET
NO.	Material	Description

MY CABLE MART LLC

Title: 3.5MM STEREO M/F			
Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: CLR	
Customer P/N:	REV: A1	Check BY: DYH	
Date: 2023.07.11	Drawing NO.:	Unit: mm	Appd BY: