



RoHS
COMPLIANT

P1

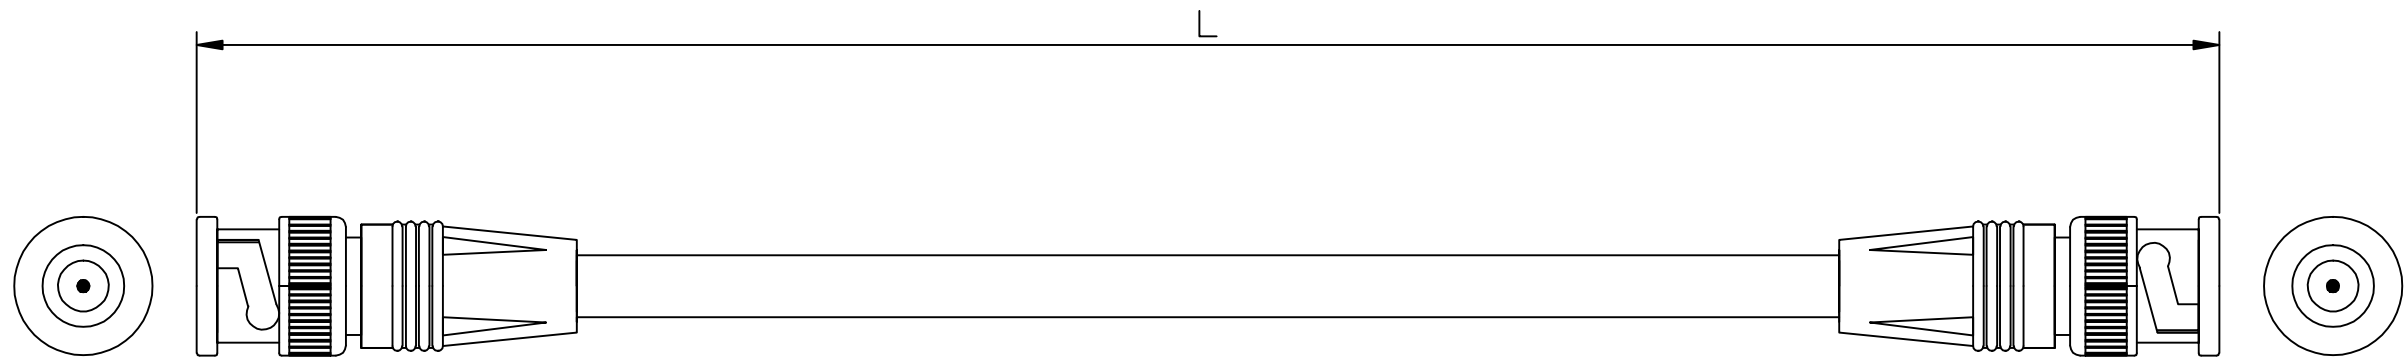

P2

PIN ASSIGNMENT:

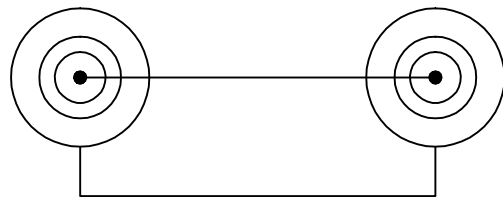

NOTES:

1. 100% OPEN & SHORT TESTING
2. VOLTAGE: 300V DC
3. INSULATION RESISTANCE: 20M ohm
4. CONTACT RESISTANCE: 1 ohm

CUSTOMER P/N	length
FE-SDI12-01	1.5<FT>450MM ± 20MM
FE-SDI12-02	2<FT>610MM ± 20MM
FE-SDI12-03	3<FT>910MM ± 30MM
FE-SDI12-06	6<FT>1830MM ± 50MM
FE-SDI12-08	8<FT>2440MM ± 50MM
FE-SDI12-10	10<FT>3050MM ± 80MM
FE-SDI12-12	12<FT>3650MM ± 100MM
FE-SDI12-15	15<FT>4570MM ± 100MM
FE-SDI12-20	20<FT>6100MM ± 200MM
FE-SDI12-25	25<FT>7620MM ± 200MM
FE-SDI12-50	50<FT>15240MM ± 300MM

NO.	Material	Description
6		
5		
4		
3	45Pa PVC RED	
2	75Ω BNC PLUG	
1		UHDTV-SDI 75Ω QUAD SHIELD COAXIAL CABLE 18AWG (1/1.05BC)+ AL + 64B + AL + 64B OD:7.0MM BLACK

MY CABLE MART LLC

Title: SDI12 COAXIAL CABLE BNC M/M			
Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: CLR	
Customer P/N:	REV: A	Check BY: DYH	
Date: 2020.08.22	Drawing NO.: FSDI1201	Unit: mm	Appd BY: