



P1

P2

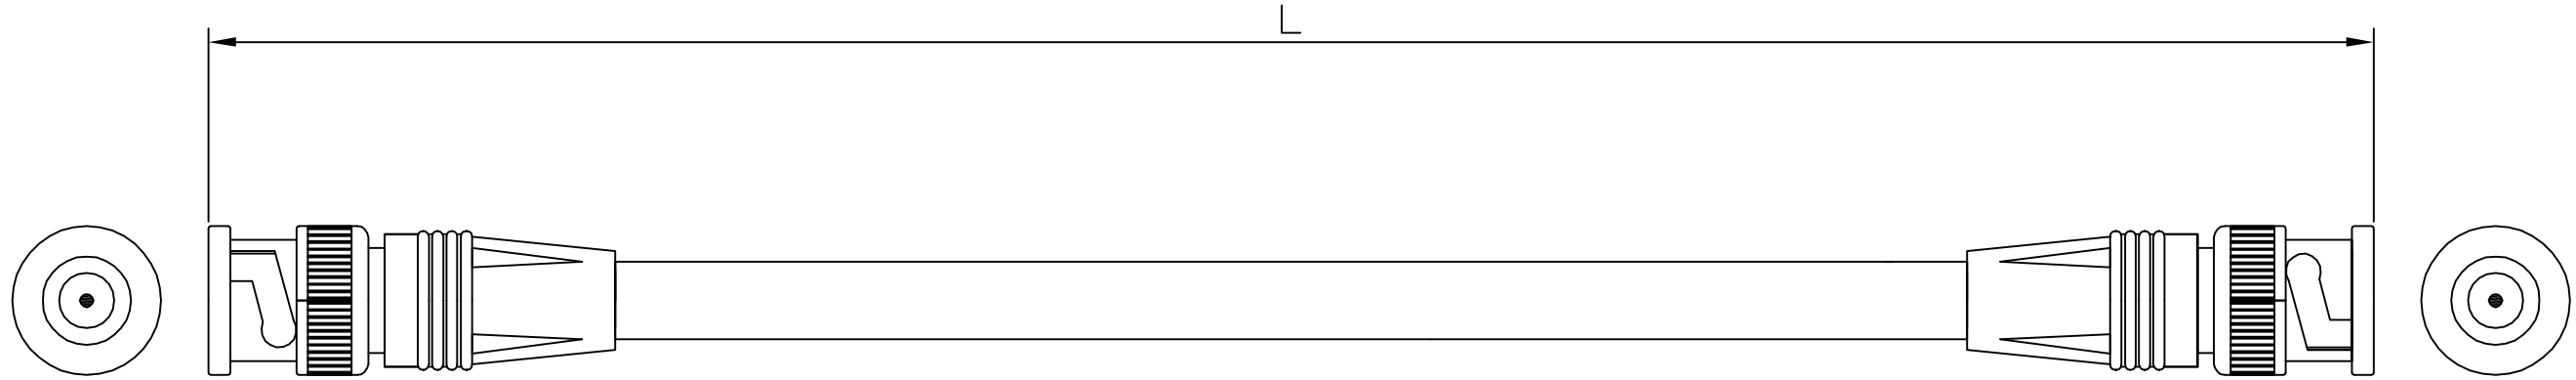

PIN ASSIGNMENT:

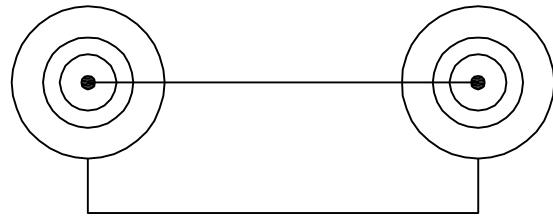

CUSTOMER P/N	length
FE-SDI6-03	3<FT>910MM ± 30MM
FE-SDI6-06	6<FT>1830MM ± 50MM
FE-SDI6-10	10<FT>3050MM ± 50MM
FE-SDI6-12	12<FT>3650MM ± 100MM
FE-SDI6-15	15<FT>4570MM ± 100MM
FE-SDI6-20	20<FT>6100MM ± 200MM
FE-SDI6-25	25<FT>7620MM ± 200MM
FE-SDI6-50	50<FT>15240MM ± 300MM
FE-SDI6-75	75<FT>22860MM ± 300MM
FE-SDI6-100	100<FT>30480MM ± 300MM
FE-SDI6-150	150<FT>45730MM ± 500MM
FE-SDI6-200	200<FT>60970MM ± 500MM
FE-SDI6-250	250<FT>60220MM ± 500MM

6		
5		
4		
3		45Pa PVC BLUE OUTER JACKET
2		BNC-75Ω SHIELDED connector
1		6G-SDI CABLE 18AWG(1/1.05pure copper) + AL + 128B OD:7.0MM BLACK
NO.	Material	Description

MY CABLE MART LLC

Title: 6G-SDI CABLE			
Customer: MY CABLE MART LLC		Page:1/1	Drawn BY:CLR
Customer P/N:		REV:A	Check BY:DYH
Date:2017.06.22	Drawing NO.: FR6G01	Unit:mm	Appd BY: