
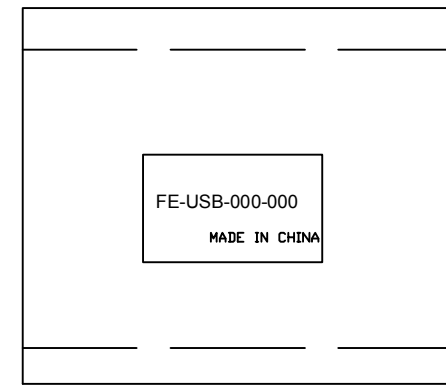


PIN ASSIGNMENT:

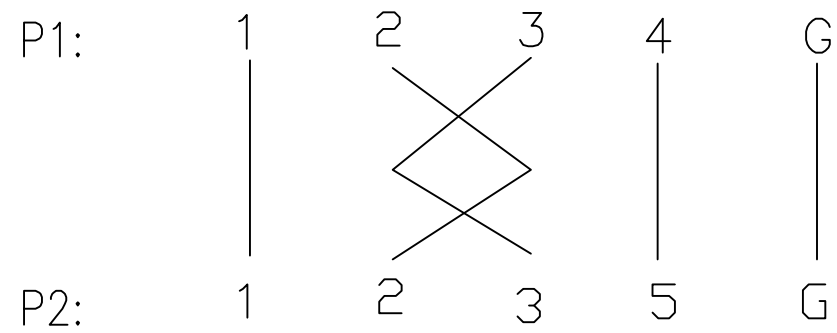

CUSTOMER P/N	length
FE-USB-ACB5-6IN	6(IN)150MM ± 20MM
FE-USB-ACB5-10IN	10(IN)250MM ± 20MM
FE-USB-ACB5-01	1.5(FT)900MM ± 30MM
FE-USB-ACB5-02	2(FT)4570MM ± 30MM
FE-USB-ACB5-03	3(FT)4570MM ± 50MM
FE-USB-ACB5-06	6(FT)4570MM ± 50MM
FE-USB-ACB5-10	10(FT)4570MM ± 50MM
FE-USB-ACB5-15	15(FT)4570MM ± 80MM

NOTES:

- 1.100% OPEN&SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

8		
7		
6		PE BAG+LABEL
5		PCV45Pa Black External mold
4		PE Internal mold
3		MICRO-B USB 5PM
2		USB2.0 AM L
1		USB2.0 cable 28AWG(7/0.12BC)*1P+24AWG(7/0.2BC) *2C+AL+D OD: 4.0mm Black
NO.	Material	Description

MY CABLE MART LLC

Title: USB2.0 CABLE AM TO MICRO-B 5PM			
Customer: MY CABLE MART LLC		Page: 1/1	Drawn BY: CLR
Customer P/N:		REV: A	Check BY: DYH
Date: 2019.01.09	Drawing NO.: FUA001-1	Unit: mm	Appd BY: