
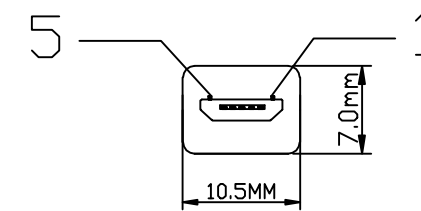
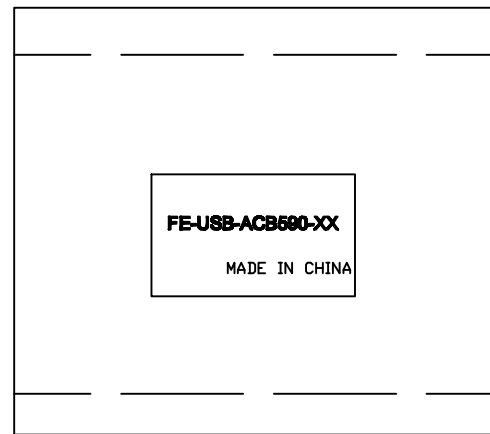


PIN ASSIGNMENT:

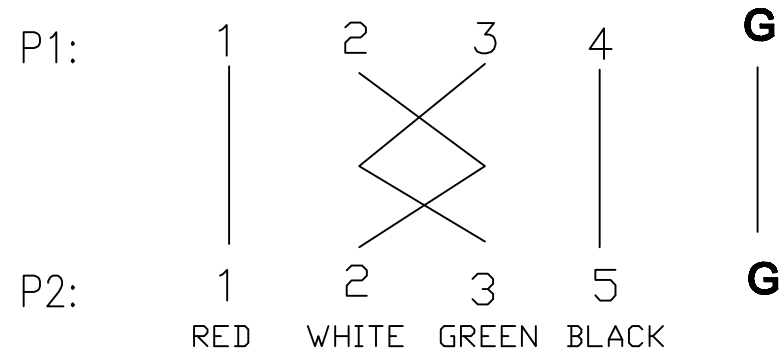

NOTES:

- 100% OPEN & SHORT TESTING
- VOLTAGE: 300V DC
- INSULATION RESISTANCE: 20M ohm
- CONTACT RESISTANCE: 5ohm

CUSTOMER P/N	length
FE-USB-ACB590-6IN	6(IN)150MM ± 20MM
FE-USB-ACB590-10IN	10(IN)250MM ± 20MM
FE-USB-ACB590-01	1.5(FT)450MM ± 30MM
FE-USB-ACB590-02	2(FT)500MM ± 30MM
FE-USB-ACB590-03	3(FT)905MM ± 30MM
FE-USB-ACB590-06	6(FT)1830MM ± 30MM
FE-USB-ACB590-10	10(FT)3050MM ± 50MM
FE-USB-ACB590-15	15(FT)4570MM ± 50MM

NO.	Material	Description
8		
7		
6		
5		PE BAG+LABEL
4		PCV45Pa Black
3		MICRO-B USB 5PM
2		USB2.0 AM
1		USB2.0 cable 28AWG(7/0.12BC)*1P+24AWG(7/0.2BC) *2C+AL+D OD: 4.5mm Black

<b>MY CABLE MART LLC</b>			
Title: <b>USB2.0 CABLE AM TO MICRO-B 5PM</b>			
Customer: MY CABLE MART LLC		Page: 1/1	Drawn BY: CLR
Customer P/N:		REV: A2	Check BY: DYH
Date: 2018.03.14	Drawing NO.: FUAM91	Unit: mm	Appd BY: