
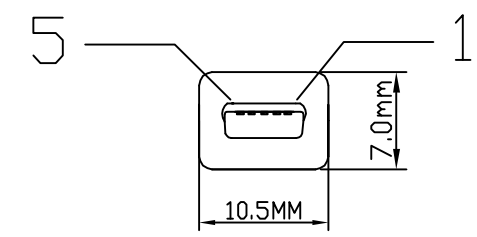
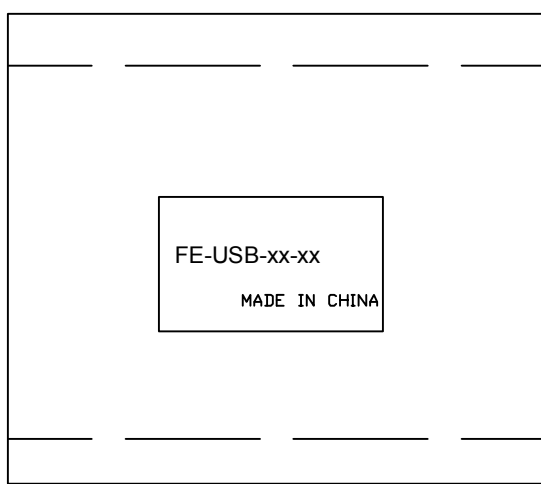


PIN ASSIGNMENT:

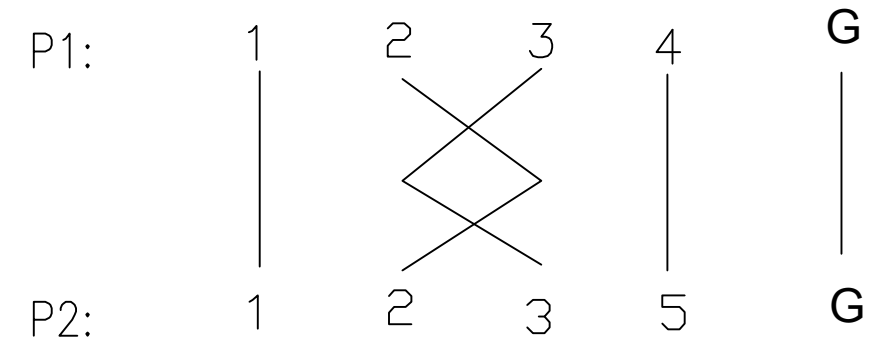

NOTES:

- 1.100% OPEN & SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

CUSTOMER P/N	length
FE-USB-ANB5-90-9IN	9(IN)230MM ± 20MM
FE-USB-ANB5-90-18IN	18(IN)457MM ± 30MM
FE-USB-ANB5-90-01	1(FT)300MM ± 20MM
FE-USB-ANB5-90-02	2(FT)605MM ± 30MM
FE-USB-ANB5-90-07	7(FT)2135MM ± 50MM

NO.	Material	Description
8		
7		
6		
5		PE BAG+LABEL
4		PCV45Pa Black
3		MINI-B USB 5PM
2		USB2.0 AM
1		USB2.0 cable 28AWG(7/0.12)*1P+24AWG(7/0.2BC) *2C+AL+D OD: 4.0mm Black

**MY CABLE MART LLC**

Title: <b>USB2.0 CABLE AM TO MINI-B 5PM</b>			
Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: CLR	
Customer P/N:	REV: A	Check BY: DYH	
Date: 2013.10.07	Drawing NO.: FUAM90	Unit: mm	Appd BY: