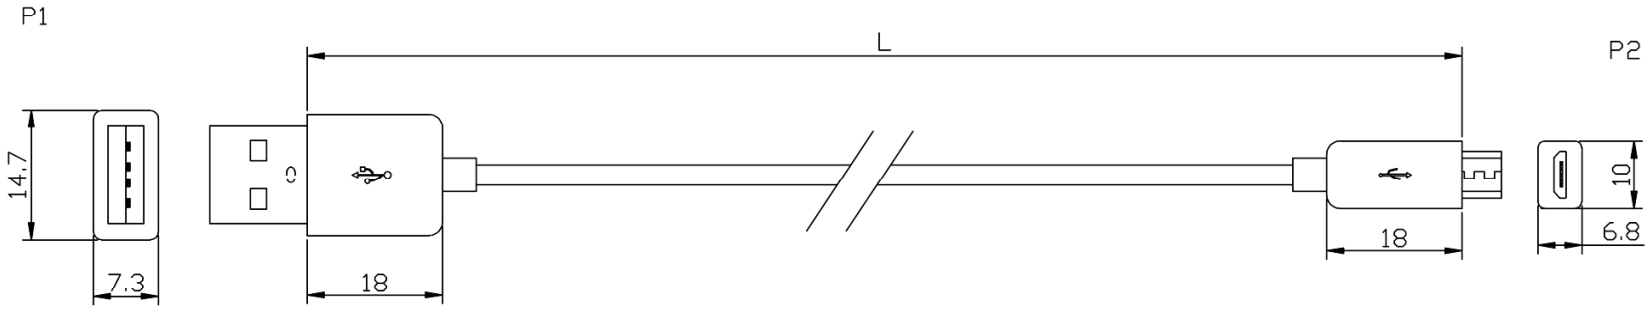

PIN ASSIGNMENT:

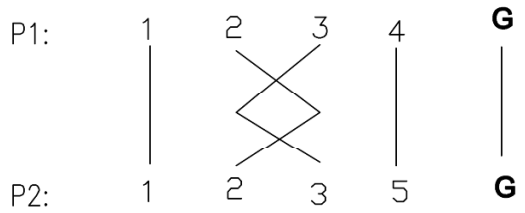

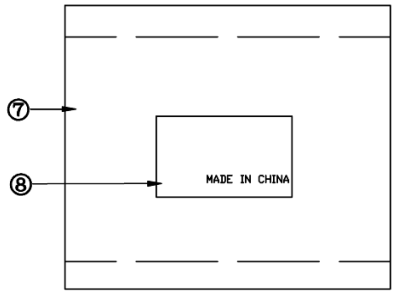

NOTES:
1.100%OPEN&SHORT TESTING
2.VOLTAGE:300V DC
3.INSULATION RESISTANCE:20M ohm
4.CONTACT RESISTANCE:1 ohm

CUSTOMER P/N	length
FE-USB-SACB5-01	1.5(FT)900MM ± 30MM
FE-USB-SACB5-02	2(FT)4570MM ± 30MM
FE-USB-SACB5-03	3(FT)4570MM ± 50MM
FE-USB-SACB5-06	6(FT)4570MM ± 50MM
FE-USB-SACB5-10	10(FT)4570MM ± 50MM
FE-USB-SACB5-15	15(FT)4570MM ± 50MM

NO.	Material	Description
8		
7		
6		
5		PE BAG+LABEL
4		PCV45Pa Black
3		MICRO-B USB 5PM ASS'Y PLASTIC SHELL
2		USB2.0 AM ASS'Y PLASTIC SHELL
1		USB2.0 cable 28AWG(7/0.12BC)*1P+24AWG(7/0.2BC) *2C+AL+D OD:3.0mm Black

My Cable Mart, LLC

Title:
USB2.0 CABLE AM TO MICRO-B 5PM

Customer: MY CABLE MART LLC
Customer P/N:
Date: 2015.01.09
Drawing NO.: FUAM01-1
Page: 1/1
REV: A
Unit: mm
Drawn BY: CLR
Check BY: DYH
Appd BY: