


PIN ASSIGNMENT:

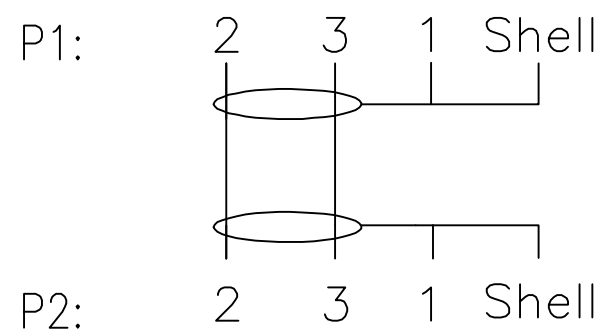

NOTES:

1. 100% OPEN & SHORT TESTING
2. VOL TAGE:300V DC
3. INSULATION RESISTANCE:20M ohm

CUSTOMER P/N	length
FE-XLR-03MF	3(FT)905MM ± 30MM
FE-XLR-06MF	6(FT)1830MM ± 30MM
FE-XLR-10MF	10(FT)3050MM ± 50MM
FE-XLR-15MF	15(FT)4570MM ± 80MM
FE-XLR-25MF	25(FT)7620MM ± 100MM
FE-XLR-50MF	50(FT)15240MM ± 150MM
FE-XLR-100MF	100(FT)304800MM ± 200MM

8		
7		
6		
5		
4		
3		XLR 3P FEMALE (PIN GOLD PLATED)
2		XLR 3P MALE (PIN GOLD PLATED)
1		18AWG(41/0.16BC)*2C+AL+B(128/0.1BC) OD:6.5mm BLACK PVC(90Pa) JACKET
NO.	Material	Description

MY CABLE MART LLC

Title: XLR 3P AUDIO EXTENSION CABLE			
Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: CLR	
Customer P/N:	REV: A	Check BY: DYH	
Date: 2017.12.12	Drawing NO.: FVMM02	Unit: mm	Appd BY: