



PIN ASSIGNMENT:

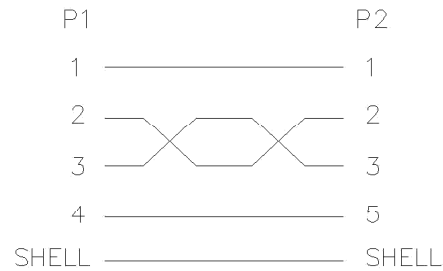

PACKING MODE

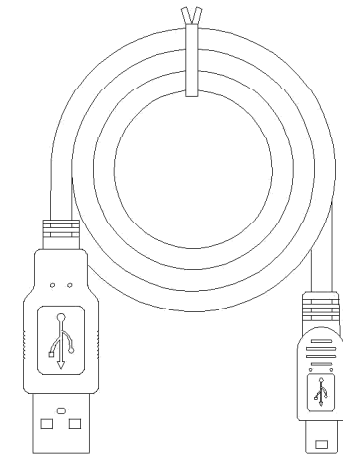

ELECTRICAL CHARACTER:

- 1.100% OPEN & SHORT TESTING.
- 2.WITHSTANDING VOLTAGE:DC 200V 0.01SEC.
- 3.INSULATION RESISTANCE:5M OHMS MIN.
- 4.CONDUCTIVE RESISTANCE: 3 OHMS MAX.

GENERAL TOLERANCES (UNLESS SPECIFIED)				CUST PART NO.: <b>FS-USB-ANB5-##</b>					
.XXX: ±0.15		ANGULAR: ±3°		DESIGN: ERIC		SCALE: NONF	UNIT: mm	THIRD ANGLE PROJECTION	
.XX: ±0.25				CHECKED: ERIC		TITLE: USB AM TO MINII USB BM 5P CABLE			
.X: ±0.50				APPROVED:		PART NO.:			REV:A
SIZE A4		DATE: 2012.11.9		SHEET NO.: 1 OF 1					

ITEM	DESCRIPTION	UNIT	QTY
4	PVC: BEIGE WHITE.	g	10
3	CONN: USB MINI 5P BM,CONTACT:GOLD PLATED,SHELL:NICKEL PLATED,BLACK INSULATOR	PCS	1
2	CONN: USB AM,CONTACT:GOLD PLATED,SHELL:NICKEL PLATED,WHITE INSULATOR.	PCS	1
1	CABLE: 28AWG(7/0.12 TC)x2C+30AWG(7/0.10 TC)x2C+AL/MYLAR+DRAIN(7/0.12) PVC JACKET OD: 4.0mm,BEIGE WHITE.	mm	1820