


E358026 AWM STYLE 20276 80°C 30V VW-1 HIGH PERFORMANCE DVI-D CABLE

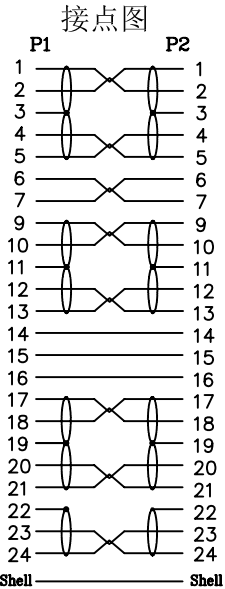

ELECTRICAL TESTING:  
 (1)100% open short &miss wire test.  
 (2)Insulation Resistance:5MΩ.  
 (3)Contact Resistance:5 Ω .  
 (4)Dielectric Strength:DC 300V/0.1s.  
 (5)HDTV-DVD(1080P):100%.Testing Line Process.

Client NO	GC-DD-1	GC-DD-03	GC-DD-06	GC-DD-10	GC-DD-12
Length	458±30mm(1.5FT)	915±20mm(3FT)	1830±30mm(6FT)	3050±50mm(10FT)	3660±50mm(12FT)

NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes
⑤	OUTER MOLDED	45P Black PVC	g	12	
④	INNER MOLDED	PE	g	8	
③	SCREW	DVI Screw,Nickel Plater, L43.2*USA4-40/Φ2.8	PCS	2	
②	CON	DVI 24+1 Gold Plated Connector	PCS	2	
①	CABLE	[(30AWG+FPE)*1P+D+AL-foil]*7P+(30AWG+HDPE)*1P+(30AWG+HDPE)*3C+AEB+Black PVC OD7.3mm	PC	1	

X.±0.20		<b>MY CABLE MART LLC</b>			
.X±0.15					
.XX±0.10		Drawing No.	JXD-DV1001/G/BK/30AWG		
REV	A/0	Title	DVI 24+1 M-M	Draw	Song
Scale	/	Customer	1-39	Checked	
Page	1/1	Item No.		Sales	
Unit	mm	Date	2023/05/12	Approval	