


8	7	6	5	4	3	2	1
REV.				DESCRIPTION		DATE	DESIGN

High Speed HDMI™ Cable with Ethernet E358026 9\ AWM STYLE 20276 80°C 30V VW-1

PIN Assignment

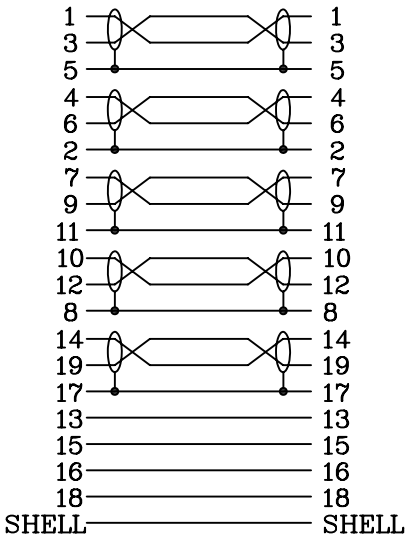

1. Test Condition:
 (1) 100% OPEN & SHORT TEST;
 (2) Insulation Resistance: DC300V 5MΩ(Min) ;
 (3) Conductor Resistance: 20Ω/Max.
 (4) Hi-Pot:DC 300V/0.1s.
 2. The product is ROHS compliant.
 3. HDTV-DVD TEST:4K@30HZ

Client NO	GC-HH24-75	GC-HH24-85
Length	22860±200mm(75FT)	25910±250mm(85FT)

⑤	OUTER MOLDED	45P Black PVC	g	20	
④	INNER MOLDED	PE	g	10	
③	CON	HDMI AM Gold Plated Connector,with IC-HT8181	PCS	1	
②	CON	HDMI AM Gold Plated Connector	PCS	1	
①	CABLE	[(24AWG+FPE)*2C+D+HDPE+AL-foil]*5P+ (28AWG+HDPE)*4C+AL+AEB+Black PVC OD9.0mm	PC	1	
NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes

		<h1>MY CABLE MART LLC</h1>			
X.±0.20 .X±0.15 .XX±0.10					
REV	A/0	Title	HDMI AM-AM	Draw	Song
Scale	/	Customer	1-39	Checked	
Page	1/1	Item No.	-	Sales	
Unit	mm	Date	2021/10/27	Approval	