


8	7	6	5	4	3	2	1	
				REV.	DESCRIPTION		DATE	DESIGN

PIN Assignment

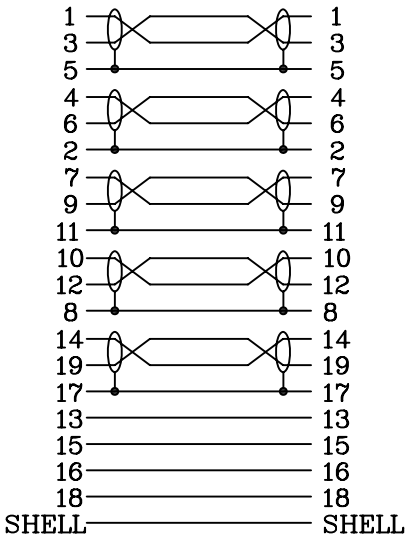

1. Test Condition:
 (1) 100% OPEN & SHORT TEST;
 (2) Insulation Resistance: DC300V 5MΩ(Min) ;
 (3) Conductor Resistance: 5Ω/Max.
 (4) Hi-Pot:DC 300V/0.1s.
 2. The product is ROHS compliant.
 3. HDTV-DVD TEST:4K@60HZ

Client NO	GC-HH28-20	GC-HH28-25	GC-HH28-30	GC-HH28-35
Length	6100±50mm(20FT)	7620±50mm(25FT)	9150±100mm(30FT)	10670±100mm(35FT)

⑤	OUTER MOLDED	45P Black PVC	g	12	
④	INNER MOLDED	PE	g	8	
③	CON	HDMI AM Gold Plated Connector+IC	PCS	1	
②	CON	HDMI AM Gold Plated Connector	PCS	1	
①	CABLE	[(28AWG+FPE)*1P+D+HDPE+AL-foil]*5P+ (28AWG+HDPE)*4C+AL+AEB+Black PVC OD7.3mm	PC	1	
NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes

X.±0.20		MY CABLE MART LLC			
.X±0.15					
.XX±0.10		Drawing No.	JXD-HD1120/G/BK/28AWG+IC		
REV	A/O	Title	HDMI AM-AM	Draw	Song
Scale	/	Customer	1-39	Checked	
Page	1/1	Item No.	-	Sales	
Unit	mm	Date	2021/10/27	Approval	