

U S E R M A N U A L

HDMI Splitter 1x2 1.4V

(Built-In HDMI Source Cable)

Enjoy the vivid world!

INTRODUCTION

Dear customer Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference. Our series of HDMI converters, switchers, extenders, matrixes and splitters are designed to make your A/V device use more convenient, more comfortable, more productive and more cost-efficient.

The 1x2 Splitter HDMI Cable that supports ultra HD 3D&4K*2K, The Splitter Cable allows one HDMI devices to be split easily to two HDMI compatible monitors or projectors.

Our devices offer solutions for noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.

FEATURES

- ◆ One HDMI 1.4v input signal split to two HDMI 1.4v sink devices
- ◆ Support 3D
- ◆ Support 4K*2K
- ◆ Support deep color 30bit, 36bit, 48bit
- ◆ Support Blue-Ray 24/50/60fs/HD-DVD/xvYCC
- ◆ Digital audio format, as DTS-HD/Dolby-trueHD/LPCM7.1/DTS/Dolby-AC3/DSD/HD(HBR)
- ◆ Support signal retiming
- ◆ No loss of quality
- ◆ Installs in minutes
- ◆ USB power supply


Operating and Connecting:

- ◆ Built-In HDMI Source Cable connection signal source
- ◆ Connect one cable from each display (monitor or projector) into the HDMI Splitter Cable outputs.
- ◆ USB connection power supply equipment

SPECIFICATIONS:

HDMI version.....	HDMI 1.4v
HDMI resolution.....	24/30Hz/2160P,24/50/60Hz/1080p/1080i/720p/576p/576i/480p/480i
Support video color format	24bit/deep color 30bit,36bit, 48bit
Support audio format.....	DTS-HD/Dolby-trueHD/LPCM7.1/DTS/Dolby-AC3/DSD HD(HBR)
Max bandwidth.....	340MHz
Max baud rate.....	10.2Gbps
Input/Output TMDS signal	0.5~1.5Volts p-p(TTL)
Input/Output DDC signal	5Volts p-p (TTL)
Max working current.....	500mA
Operating Temperature range.....	(-15 to +55°C)
Operating Humidity range.....	5 to 90%RH (No Condensation)
HDMI Source Cable Length	45cm
Dimension (L x W x H)	60*55*18(mm)
N. Weight.....	100g

Connection diagram

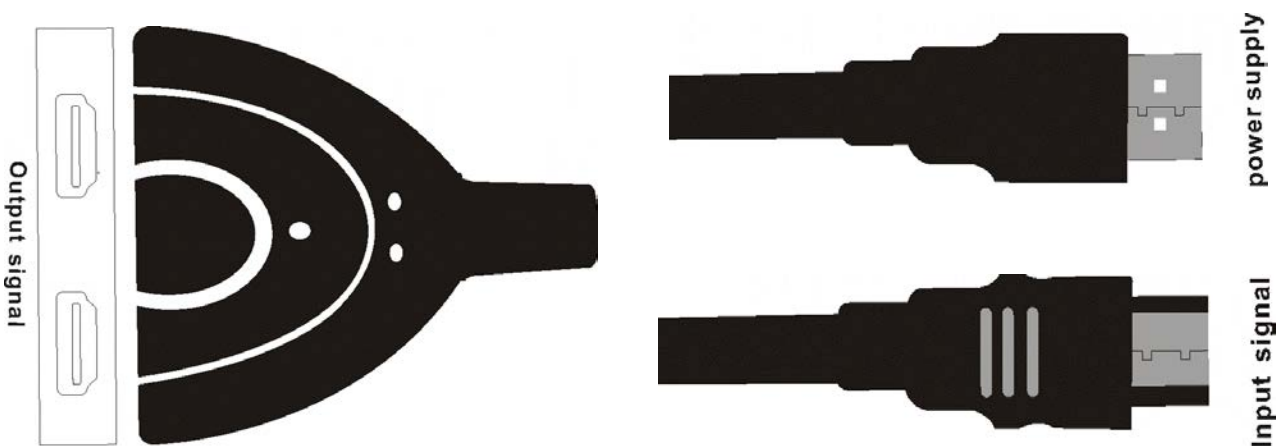

Notes:

Pls use the machine as the instruction listed to keep the long use lifetime of the machine.

1. The machine should be placed at the spot far from the Damp, High-Temperature, Dusty, Erosive, and oxidative environment.
2. All parts will be free from the strong shake, hit, fall.
3. Pls hold the power adaptor head and do not pull the power cord when cut off from the socket.
4. Pls turn the power off when the machine is not used for long time.
5. Pls do not open the cover and do not touch the inside parts.
6. Pls use the original factory power adaptor.