
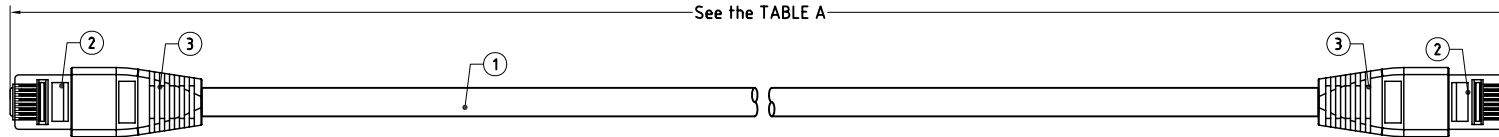


RoHS Compliant

REV.	Revision note	Date	Signature	Checked
1.0	Release to product	16/10/31	Pillar	



Marking:CAT5E / 350Mhz / STP / RoHS








TABLE A

HL P/N	Customer P/N	LENGTH	Conductive resistance
HC.RJ455-1783	HA-C5S-06IN-BLU	[6inch] 153±10mm	2 Ohm max.



Electrical character:

- 1)100% Open/short testing
- 2)Withstanding voltage:DC 200V AT 10ms.
AC 300V AT 10ms.
- 3)Insulation resistance:2M Ohm(min)
- 4)Conductive resistance:Table A.



Wire Details

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

PIN ASSIGNMENT(568B):

P1(T568B)		P2(T568B)
1	WHT/ORG	1
2	ORG	2
3	WHT/GRN	3
6	GRN	6
4	BLU	4
5	WHT/BLU	5
7	WHT/BRN	7
8	BRN	8
Shell	Drain+Braid	Shell

3	Hood	RJ45 Hood:PVC 70Pa,Blue,UL94V-0	-----	
2	Conn	RJ45 Plug, Pin G/F,with shell	-----	
1	Cable	Cat.5e STP 26AWG(7/0.16mm,CCA)×4P+A·D(7/0.16mm,CCA)·B(16/5/0.12mm,Al-Mg), Blue, OD5.5mm	-----	
NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK

Mould number:	Customer: M018UA	Customer P/N:	See table A	Article No./ HL-GC-001		
	Designed by: Pillar	Checked by:	Approved by	File number: D-1783	Date: 16/10/31	Scale: none
	HAILINK TM Electronics Limited			Name: Cat5e STP cable,Blue		
Packing file:	This drawing contains information that is proprietary to Hailink Electronics Limited incorporated and should not be used without written permission			P/N: HC.RJ455-1783	Edition: 1.0	Sheet: 1/2