

SPECIFICATION

Input Connector	HDMI Female
Output Connector	HDMI Female, Toslink, Coaxial, 3.5mm Stereo
Video Amplifier Bandwidth	10.2Gbps
Output Resolutions	480i~1080i@50&60Hz 480p~1080p@50&60Hz 3840X2160@24&30Hz
Dimension	70(L) x 60(W) x 20(H) mm
Weight	370g
Operating Temperature	0℃ to +70℃
Power Supply	5V DC @2A

SAFETY PRECAUTIONS

Please read the following safety precautions carefully before you unpack and install this equipment.

1. Do not expose the unit to rain, moisture or any other dripping liquids. And keep it away from any wet locations such as fishing tanks, vases.
2. Do not install the unit close to fire or any other heat sources.
3. Keep the unit in dry and ventilated area. Do not install in bookcase, cabinet or any other confined space.
4. Stop using the unit during thundering or lightening storms.
5. Avoid the power cable to be stepped on or pinched. Position the unit carefully to avoid damage or accident.
6. Clean the unit only with dry cloth.
7. Only use accessories specified by the manufacturer.
8. Unplug the equipment when unused for a long period of time.
9. Do not try to open any non-serviceable parts. Contact your authorized servicing center and personnel.



HDMI 2CH/5.1CH Audio Extractor

HH51AU4

User Manual

INTRODUCTION

This product not only to meet the ideal image of the HDTV but also to meet the need of the enthusiasts' requirement for audio, Because it can extract the audio signal from the HDMI interface, then transmit audio to the Amplifier Receiver by SPDIF or Stereo.

PACKAGE CONTENTS


- 1X HDMI 2CH/5.1CH Audio Extractor
- 1X5V DC Power Supply
- 1XUser Manual

FEATURES


- Supports audio output simultaneously: SPDIF and Stereo.
- Supports the highest video resolution to 3840X2160@24&30Hz.
- Supports 10.2Gbps bandwidth.
- Supports 12bit per channel (36bit all channel) deep color.
- Supports HDCP.
- Supports uncompressed audio such as LPCM.
- Supports compressed audio such as DTS Digital, Dolby Digital.

PANEL DESCRIPTION

Front Panel

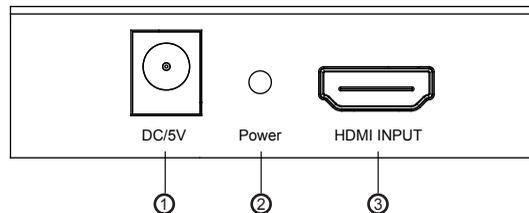

Rear Panel

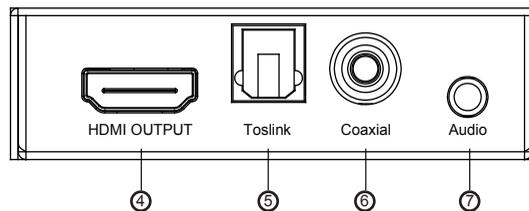

- ①POWER SUPPLY INPUT
- ②POWER LED
- ③HDMI INPUT
- ④HDMI OUTPUT
- ⑤TOSLINK OUTPUT
- ⑥COAXIAL OUTPUT
- ⑧STEREO AUDIO OUTPUT

INSTALLATION

- Connect the input of this product to HDMI Source.
- Connect the output of this product to HDMI Display.
- Connect SPDIF or Stereo port to Amplifier Receiver according to the format of the audio output.
- Insert the DC side of 5V power supply into the unit and then connect the AC side of the power supply into the wall outlet.

CONNECTION DIAGRAM

