





RoHS Compliant

REV.	Revision note	Date	Signature	Checked
1.0	Release to producer	15/06/05	Pillar	



①



Length(See Table A)





TABLE A

HL P/N	Length	Customer P/N
HC.HH14.1134-1021	1.5ft [457±15mm]	HA-HHD14-01

Electrical character:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC/AC 300V AT 10ms.
- 3)Insulation resistance:10M Ohm(min)
- 4)Residual operating current:
 - a.<1.M=0.5mA; b.1.0~2.0M=1.0mA;
 - c.2.0~3.0M=2.0mA; d.3.0~5.0M=3.0mA;
 - e.5.0~10M=5.0mA; f.10~15M=7.0mA;
- 5)Conductive resistance:3 Ohm(Max)

Wire Details

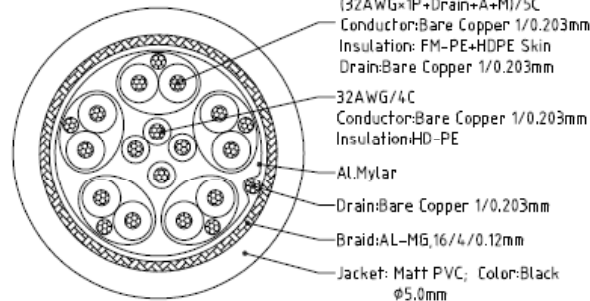

Marking:(White)
 High Speed HDMI™ Cable with Ethernet E361560 兎 AWM
 STYLE 20276 80℃ 30V VW-1

PIN ASSIGNMENT(1.4v)

HDMI 19M(A)	HDMI 19M(D)
3	5 TMS data2-
1	3 TMS data2+
2	4 TMS data2 Shield
6	8 TMS data1-
4	6 TMS data1+
5	7 TMS data1 Shield
9	11 TMS data0-
7	9 TMS data0+
8	10 TMS data0 Shield
12	14 TMS Clock-
10	12 TMS Clock+
11	13 TMS Clock Shield
19	1 HPD/ HEAC-
14	2 Utility/ HEAC+
17	16 DDC/CEC/HEAC GND
13	15 CEC
15	17 SCL
16	18 SDA
18	19 +5V Power
SHELL	Braid SHELL

NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK
5	Overmold	PVC 45Pa Black	-	N/A
4	Innermold	PE Low density	-	N/A
3	Conn	HDMI 19P D type M G/F black/LCP Shell/Steel Gold plated	-	1PCS
2	Conn	HDMI 19P A type M G/F black/LCP Shell/Steel Gold plated	-	1PCS
1	Cable	UL20276[32#(1/0.203BC)/1P+D+A+MI]/5C+32#(1/0.203BC)/4C+A+D+B(16/4/0.12.AL-MG) ODS,0mm Jacket: Black PVC	-	See Table A

Mould number:	Customer: M018UA	Customer P/N:	See table A	Article No./ HL-GC-001			
Packing file:	Designed by: Pillar	Checked by:	Approved by:	File number: D-1021	Date: 15/06/05	Scale: none	Unit: mm
				Name: HDMI A-D W/Ethernet Cable 32AWG			
This drawing contains information that is proprietary to Hailink Electronics Limited incorporated and should not be used without written permission				P/N: HC.HH14.1134-1021	Edition: 1.0	Sheet: 1/3 A3	