




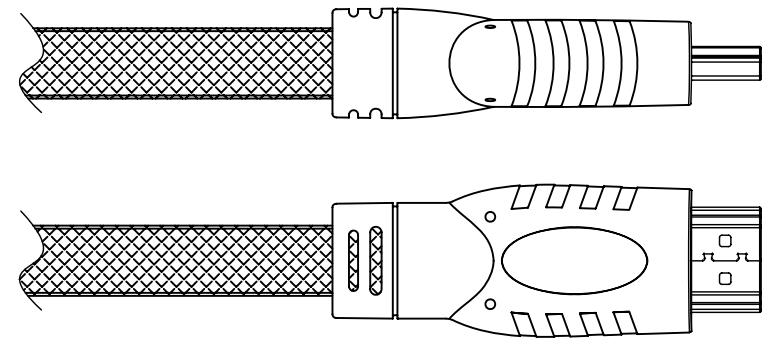


TABLE A


HL P/N	Length	Customer P/N
HC.HH112626-0283	1.5ft [457±20mm]	HA-HHXS-01
HC.HH112626-0284	3ft [915±20mm]	HA-HHXS-03
HC.HH112626-0285	10ft [3048±60mm]	HA-HHXS-10
HC.HH112626-0286	12ft [3658±70mm]	HA-HHXS-12
HC.HH112626-0287	15ft [4572±90mm]	HA-HHXS-15

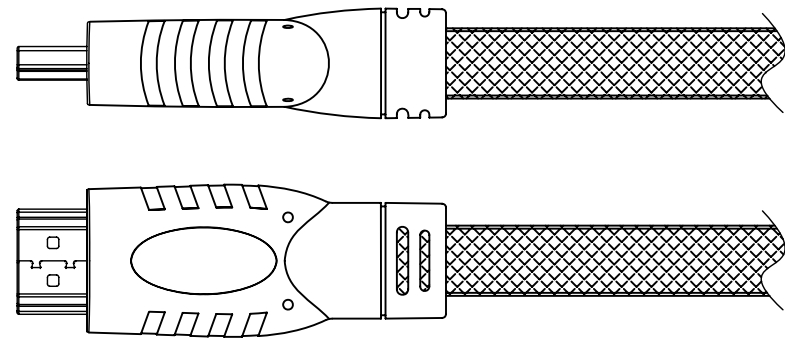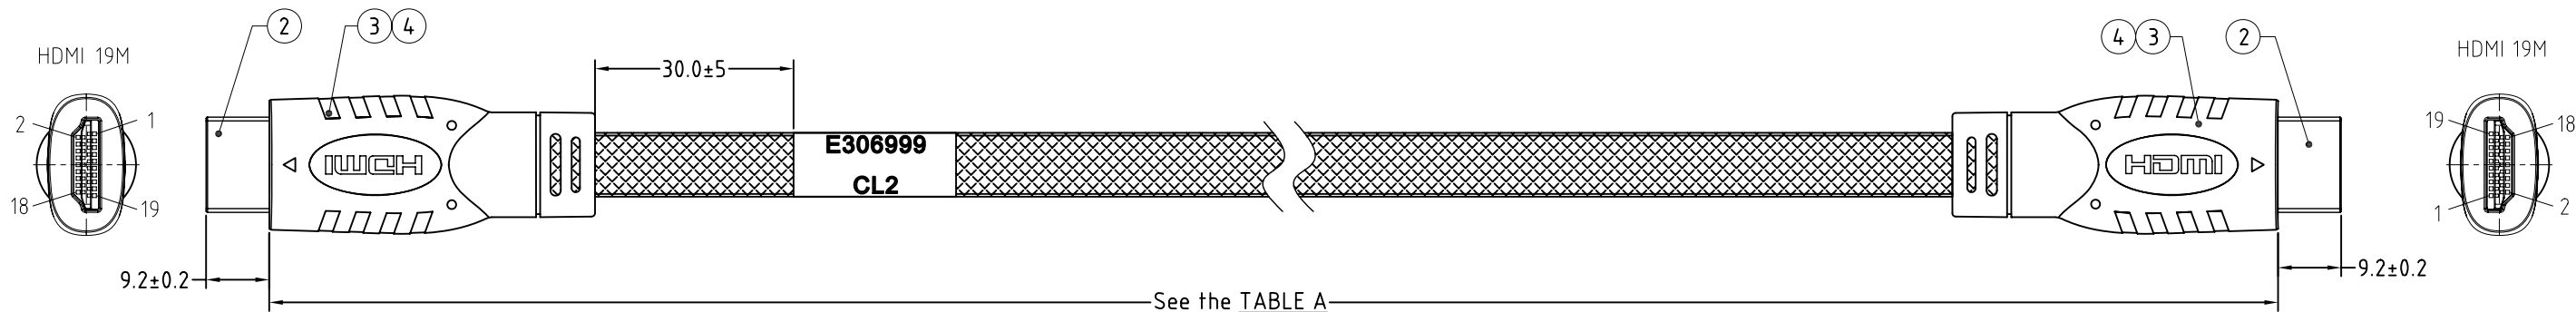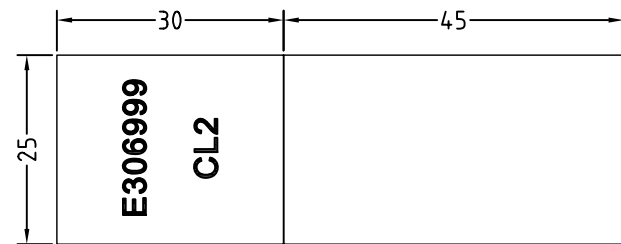

Electrical character:


- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC 300V AT 10ms.
- 3)Insulation resistance:10M Ohm(min)
- 4)Residual operating current:
a.<1.M=0.5mA; b.1.0~2.0M=1.0mA;
c.2.0~3.0M=2.0mA; d.3.0~5.0M=3.0mA;
e.5.0~10M=5.0mA; f.10~15M=7.0mA;
- 5)Conductive resistance:3 Ohm Max
- 6)Support1080P、3D、4K

Wire Details

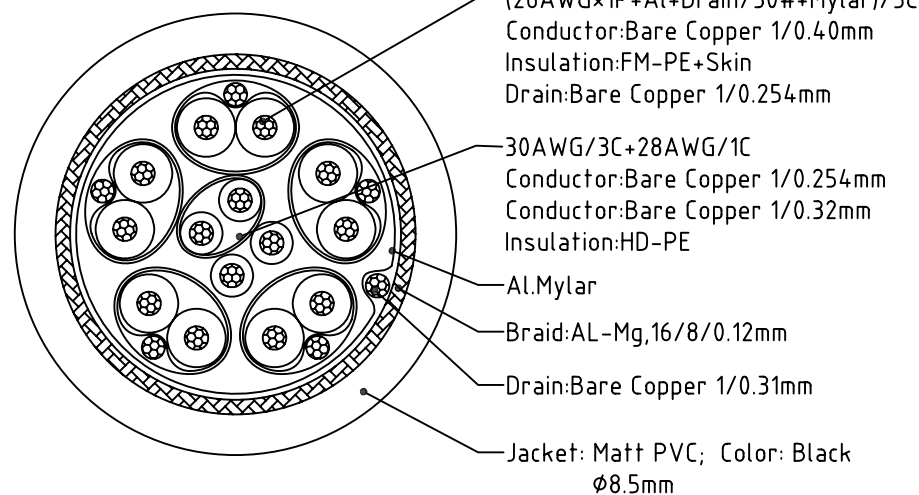

Marking:(White)
High Speed HDMI™ Cable with Ethernet E306999 (UL) TYLE CL2
SHIELDED 26AWG --- AWM 20276 80℃ 30V VW-1

PIN ASSIGNMENT(1.4v)

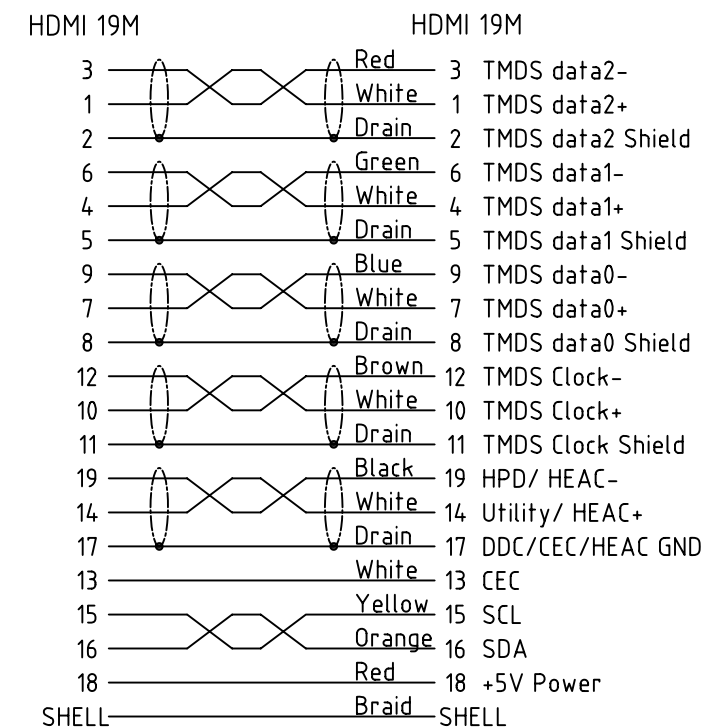

4	Overmold	PVC 60Pa black	PS02-601101	N/A
3	Innermold	PE Low density	PS00-000201	N/A
2	Conn	HDMI 19P A type male,pin G/F,black insulation/LCP shell-steel G/F	C010P-002	2PCS
1	Cable	UL20276(26#BC/1P+ADM)/5C+30#BC/3C+28#BC/1C+A+E+B(65%,AL-MG)0D8.5mm black matt PVC Jacket(CL2), with net:4x(3x0.20mm)green/32x(3x0.20mm)black PET	W56-26014.085114.03	1830±10mm
NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK

Mould number:	Customer: M018UA	Customer P/N:	See table A	Article No./ HL-GC-001			
	Designed by: Pillar	Checked by:	Approved by	File number: D-0283~287	Date: 15/06/04	Scale: none	Unit: mm
Packing file:	My Cable Mart			Name: HDMI Cable 26AWG With Ethernet			
				P/N: HC.HH112626-0283~0286		Edition: 4.0	Sheet: 1/3 A3