



TABLE A

P/N:	LENGTH	Customer P/N:
HC.MDH10130-2039	15ft[4575±40]	HA-MDPHH-15

PIN ASSIGNMENT

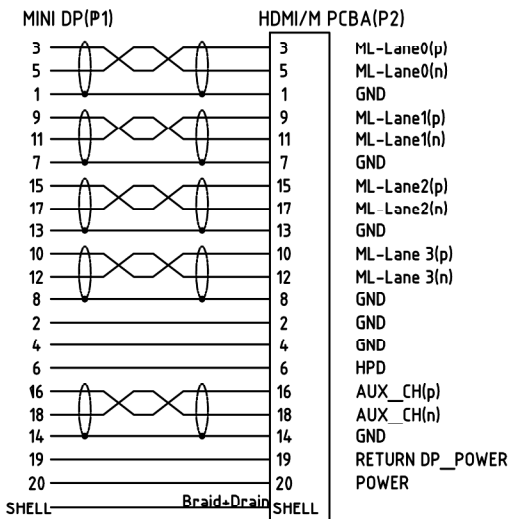

Electrical character:
 1)100% Open/short/Intermittent testing
 2)Withstanding voltage:DC/AC 300V AT 10ms.
 3)Insulation resistance:10M Ohm(min)
 4)Residual operating current:
 a.<1.M=0.5mA; b.1.0~2.0M=1.0mA;
 c.2.0~3.0M=2.0mA; d.3.0~5.0M=3.0mA;
 e.5.0~10M=5.0mA; f.10~15M=7.0mA;
 5)Conductive resistance:5 Ohm max
 6)Supports 4K/30Hz

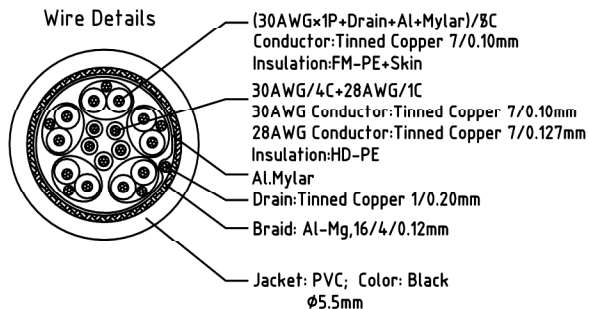

6	SR MOLDING	PVC,45Pa,Black	-----	
5	Shell	HDMI Male Black ABS Shell(Twinset Type)	-----	
4	Shell	Mini DP Male Black ABS Shell(Twinset Type)	-----	
3	Conn	HDMI Male,Pin G/F,Black Insulation,Shell(G/F Plated),Solder type PCB:PS8402A	-----	
2	Conn	Mini DisplayPort Male,Pin G/F,White Insulation,Shell(G/F Plated),Solder type	-----	
1	Cable	(30#TC×1P×D×M×A)×5+30#TC×4C+28#TC×1C×A+E×B(16/4/0.12,Al-Mg)+PVC,Black,OD:5.5mm	-----	
NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK

Mould number:	Customer: M018UA	Customer P/N: See the TABLE A	Article No./ HL-GC-001	
	Designed by: NDQ	Checked by:	Approved by	File number: D-2039
				Date: 18/03/29
				Scale: none
				U
Packing file:	My Cable Mart		Name: Mini DP M TO HDMI M Cable	
	This drawing contains information that is proprietary to Hallink Electronics Limited incorporated and should not be used without written permission		P/N: HC.MDH10130-2039	Edition: 1.0
				She 1/1