

SPECIFICATION

Input DDC Signal	5 volts p-p (TTL)
Output Video	HDMI
Video Amplifier Bandwidth	2.5Gbps/250MHz@50/60Hz 480i~1080i@50&60Hz 480p~1080p@50&60Hz
Dimension	86mm(L) × 44mm(W) × 16mm(H)
Weight	42g
Operating Temperature	0 °C to +70 °C
Power Supply	None

SAFETY PRECAUTIONS

Please read the following safety precautions carefully before you unpack and install this equipment.

1. Do not expose the unit to rain, moisture or any other dripping liquids. And keep it away from any wet locations such as fishing tanks, vases.
2. Do not install the unit close to fire or any other heat sources.
3. Keep the unit in dry and ventilated area. Do not install in bookcase, cabinet or any other confined space.
4. Stop using the unit during thundering or lightening storms.
5. Avoid the power cable to be stepped on or pinched. Position the unit carefully to avoid damage or accident.
6. Clean the unit only with dry cloth.
7. Only use accessories specified by the manufacturer.
8. Unplug the equipment when unused for a long period of time.
9. Do not try to open any non-serviceable parts. Contact your authorized servicing center and personnel.



HDMI Amplifier Switcher

MSW21NN00

User Manual

INTRODUCTION

This is a high performance HDMI Amplifier Switcher. This HDMI Amplifier Switcher not only has the key-press-switching function, but also has intelligent function.

This HDMI Amplifier Switcher routes high definition video (up to 1080p) and digital audio from any one of the several sources to display units. All inputs accommodate the connections of the high definition video sources simultaneously, compatible well for HD-DVD, SKY-STB, PS3, Xbox360 etc.

The output sends the high definition audio/video signals to a high definition display.

PACKAGE CONTENTS


- 1X HDMI Switcher
- 1X User's Manual

FEATURES


- Support full 3D pass through
- Support 250MHz/2.5Gbps per channel (7.5Gbps all channel) bandwidth
- HDCP pass-through
- Support compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)

PANEL DESCRIPTION


Front Panel



Upper Panel

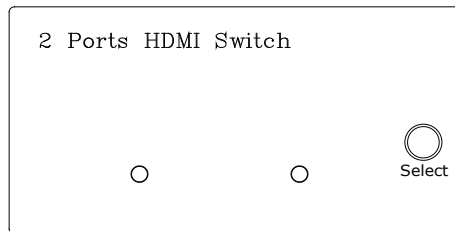

Side Panel



INSTALLATION

- Connect the HDMI input source into the HDMI switcher. (Input cables are optional) *Please refer to connection diagram section.
- Press the button to select the inputs.
- For too long HDMI cable (over 5metres), it is recommended to give a 5V DC power supply (optional) to the switch unit.

CONNECTION DIAGRAM

