






目录	设 变 内 容	日 期	修 改 人	核 准
DIRECTORY	MODIFICATION	DATE	DRAW	APPROVE




CN1



Laser LOGO
Center position
Color: black




Pin Assignment

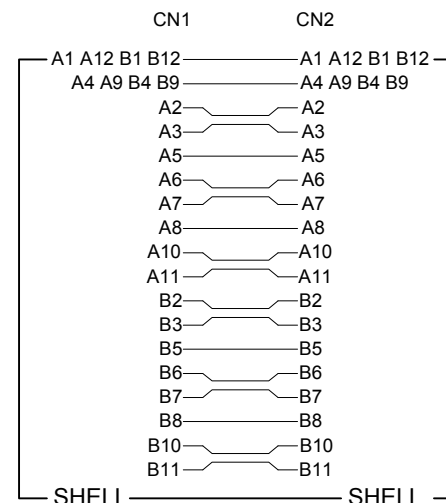

Note:

- 100% short/open circuit & wrong line test conditions.
- On-resistance $\leq 5\Omega$.
Withstand voltage test: AC 300V/10mS. Leakage current 0.5mA.
Insulation impedance $\geq 10M\Omega$. High voltage test: DC 300V/10mS.
- Support power supply and data transmission functions.
- Maximum supported transmission rate: 40Gbps.
- Salt spray requirement: 24H.

CN2

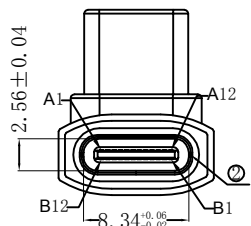

5	shell	Al shell grey	1PCS
4	inner mold	PVC 45P black	1.5G
3	n-connection	PCB T=0.8MM	1PCS
2	connector	USB TYPE CF 10.5 Shell Nickel-plated PIN Gold-plated G/F	1PCS
1	connector	USB TYPE CM Shell is matte nickel-plated PIN pin is gold-plated G/F	1PCS
Item	Name	Material	QTY

成品图
MANUFACTURE DWG



东莞蓝硕五金电子有限公司
DONGGUAN LANSHUO ELECTRONIC CO., LTD

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.50	X°	±5°
.X	±0.30	.X°	±2°
.XX	±0.10	.XX°	±1°
.XXX	±0.05	.XXX°	±0.5°

单位 UNITS	mm	制图 DRAWING	刘文浩	客户料号 CUSTOMER PART NO.	
比例 SCALE	1:1	审核 CHKD		产品名称 DWG NO.	USB TPPE CM TO CF 立体弯 90°
日期 DATE	2023.02.22	核准 APPD		产品编号 PRODUCT NO.	
角法 VIEW	⊕ ⊖	版本 VER	A0	工程图号 MODEL	张数 SHEET