


NOTE:
 1. CABLE: 28AWG, NON-UL, AL-FOIL, 25C+1, BEIGE COLOR(7032), OD=7.0±0.2mm, PVC JACKET(Conductor: : BC). (MRP 专用米色)
 2. LENGHT: L.
 3. CONNECTOSR: DB25M*2PCS(BLUE INSULATOR)(SHELL NICKEL).
 4. MOLD: MOLDED TYPE.
 5. SCREW: 4*40 INCH THUMB SCREW *4PCS.


6. CONTACTS:

DB25M	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	64
DB25M	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	64


7. Test machine test condition.
 A. 100% OPEN, SHORT & INTERMITTANCE TEST.
 B. CONDUCTOR RESISTANCE: 3ohms MAX:
 C. INSULATION RESISTANCE: 5M Min/, 10ms:
 8. ALL MUST BE MEET ON ROHS COMPLIANT.



Printing CTN Color: Blue



Printing PE BAG (COLOR: BLACK)

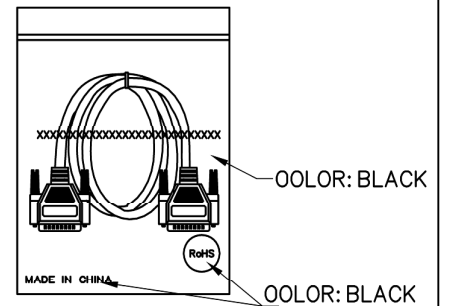

1PCS/PE BAG

COMPANY	MRP		ITEM NO.	SC-3MM	NO	B	<h1>My Cable Mart, LLC</h1>	SCALE	NON
REVISION	DATE	DISCRIPTION	DRAWN BY					UNIT(mm)	
REV.A/0	2014.11.19		DESIGNED BY					DRAWING NO.	
			APPROVAL BY						