


Combo Siamese Cable RG59 + 18/2 Power Cable

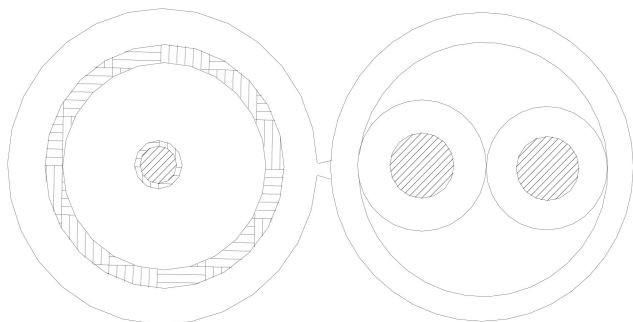

Electrical Performance

Frequency (MHz)	Attenuation (dB/100m)
1	1.15
50	5.71
100	8.20
200	11.61
400	16.73
700	22.15
1000	28.87

Construction

Center Conductor		Solid Copper
AWG		20
Diameter	(inches)	0.03228
Insulation		Skin Foamed PE
Nom. Thickness	(inches)	0.0559
Insulation Diameter	(inches)	0.14409
Braid Shield		Copper Clad Aluminum
Coverage Area	(%)	95
Jacket		CCTV
		PVC
Nom. Thickness (inches)	0.0307	0.0314
Cable Diameter (inches)	0.1756	0.2358

Electrical Characteristics

Temperature Rating	(°C)	-20 to 60
Impedance	(± 3.0 Ohms)	75
Capacitance	(pF/ft)	15.5
Conductor DCR@20° C	(ohms/1000ft)	28.6
Velocity of Propagation	(%)	84
ROHS Compliant		Yes

Cable Marking

RG59/U 95% 2C 18AWG CMR ****FT

Part Numbers

Part #	Color	Put-up
H59+182 NVR BK2	BLACK	1,000' REEL
H59+182 NVR WH2	WHITE	1,000' REEL
H59+182 NVR BK3 - 500	BLACK	500' REEL IN A BOX
H59+182 NVR WH3 - !-500	WHITE	500' REEL IN A BOX