


Rack Mount Power Distribution Unit (PDU) with 10+2 AC Outlets, 1.5U

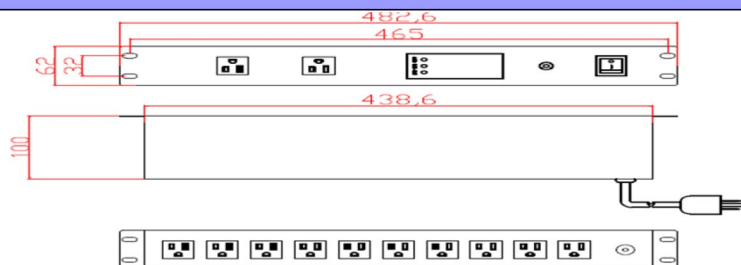

10 REAR-FACING & 2 FRONT-FACING OUTLETS

INPUT	
Voltage	120V
Frequency	60Hz
Maximum Input Current (amps)	15A
Plug Type	NEMA 5-15P
Plug Style	Straight
Cord Length	6 ft (1.8m)
Cord Spec	14AWG 3-wire grounded SJT
OUTPUT	
Voltage	120V
Frequency	60Hz
Watts	1800W
Circuit Breaker/Overload Protection	15A
Maximum Continuous Operating Voltage	130V
Outlet Quantity	2 front / 10 rear
Outlet Type	NEMA 5-15R
SURGE SUPPRESSION & FILTERING	
Surge Suppression (Joules)	700
Protection Mode	N-H, N-G and H-G
Response Time	<1 nanosecond
Maximum Surge Current (amps)	10KA
Maximum Surge Voltage	470V
Clamping Voltage	775V
EMI/RFI Filtration (dB @ frequency range)	40~60dB@10MHz
PHYSICAL	
Style	Rack Mount (1.5U)
Mounting Brackets	Pre-installed for rackmount installation; removable
Housing Material	PVC and metal enclosure
Item Dimensions (HxWxD)	2.25 x 17 x 5 (in) without ears
Item Weight	3.5 lbs
Inner Carton Qty	1 unit
Operating Temperature Range	-40° to 70° C
Operating Humidity	≤95%
Overload Protection, Sure Protection	Earth/Ground Indicator and Power Indicator Buttons
Part Number	
Part Number	Color
PDU1012M-24	BLACK