
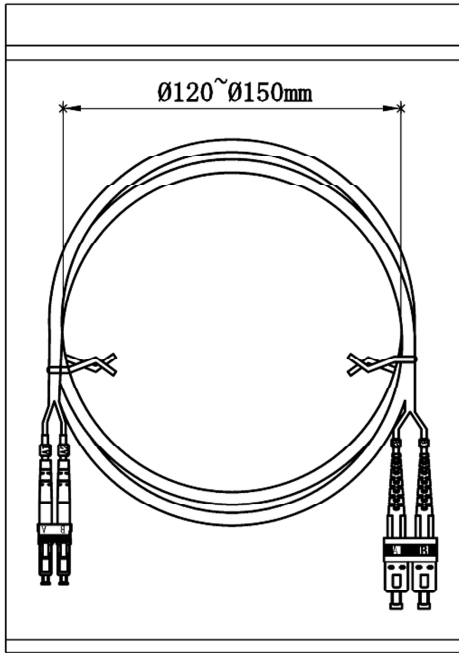


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

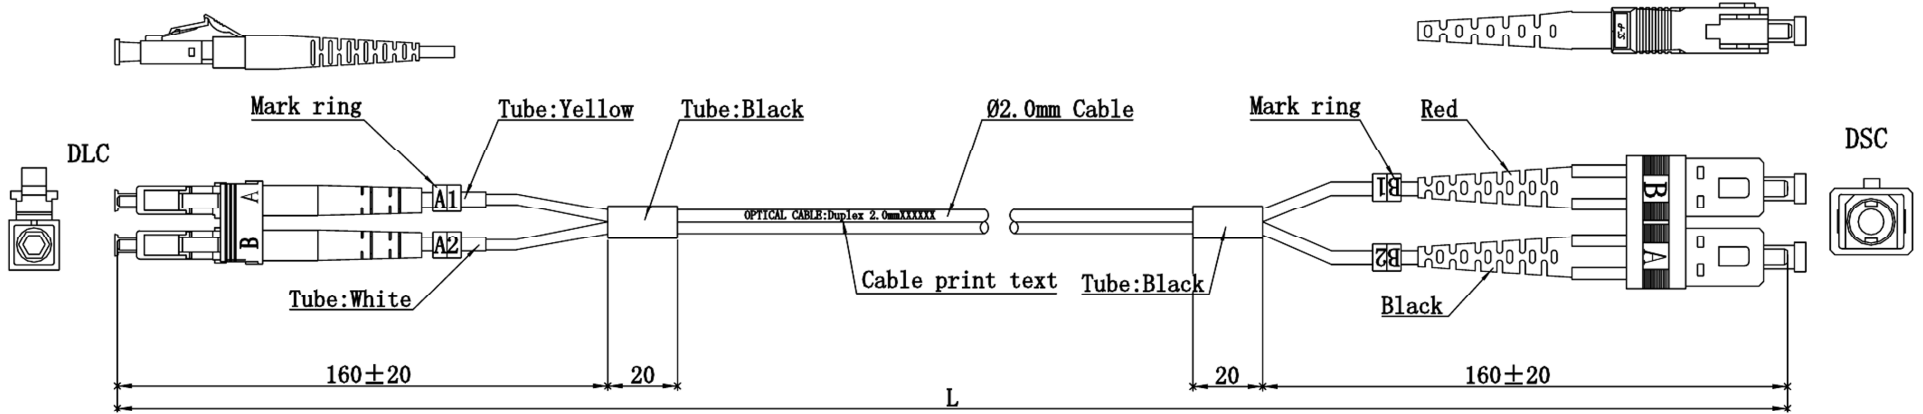

Specifications:

Type	DLC/UPC-DSC/UPC
Fiber Mode	SM
Core Diameter (um)	9/125
Operating Wavelength (nm)	1310/1550
Cable Color	Yellow
Cable Diameter (mm)	Ø2.0
Operating Temperature (° C)	-40~+75
Storage Temperature (° C)	-40~+85
SC Connector Color (Boot)	Red/Blcak
Insertion loss (dB)	≤0.3dB
Return loss (dB)	≥50dB

$L \leq 5\text{m}$ , TOLERANCES: $0 \leq \Delta L \leq 5\text{cm}$
$L > 5\text{m}$ , TOLERANCES: $0 \leq \Delta L \leq 1\% * L$

Remarks:

Length	Item #
1m	102796
1.5m	102927
2m	102797
3m	102798
4m	102928
5m	102799
6m	102929
7m	102857
8m	102879
9m	102858
10m	102880
12m	102881
15m	102881
30m	102883
40m	102884
50m	102816

My Cable Mart

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:

.	+1
.x	+0.2
.xx	+0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: LC-SC-DX SM Patchcord	
CHECKED BY	SHEET 1of1	ITEM NO.	
APPROVED BY	SCALE 1:1	REV. 00	UNIT:mm