
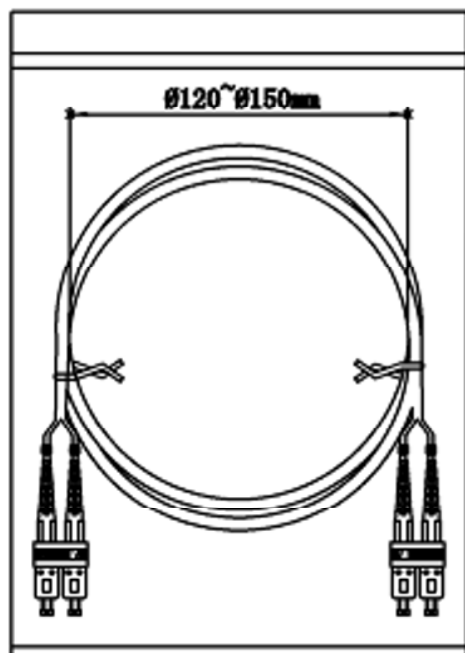


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

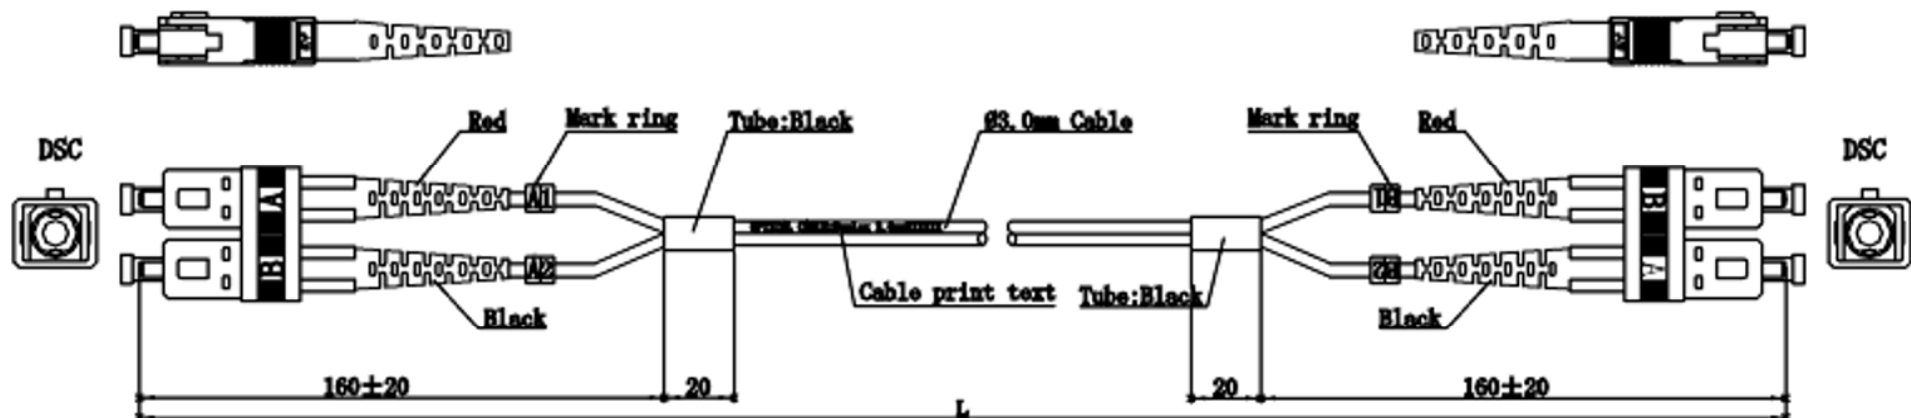

Specifications:

Type	DSC/UPC-DSC/UPC
Fiber Mode	SM
Core Diameter (um)	9/125
Operating Wavelength (nm)	1310/1550
Cable Color	Yellow
Cable Diameter (mm)	Ø3.0
Operating Temperature (° C)	-40~+75
Storage Temperature (° C)	-40~+85
SC Connector Color (Boot)	Red/Black
Insertion loss (dB)	≤0.3dB
Return loss (dB)	≥50dB

L ≤ 5m, TOLERANCES: 0 ≤ ΔL ≤ 5cm  
 L > 5m, TOLERANCES: 0 ≤ ΔL ≤ 1%\*L

Remarks:

Length	ITEM NO.
L=1M	102788
L=2M	102789
L=3M	102790
L=5M	102791
L=10M	102854

### My Cable Mart

DRAWN BY	DATE 2018/08/14	DESCRIPTION SC-SC-DX Ø3.0mm Patchcord
CHECKED BY	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the following:

	+1
∓	+0.2
∓	+0.05