


RoHS Compliant


REV.	Revision note	Date	Signature	Checked
3.0	Label content revision	12/11/15	Hange	
4.0	HDMI A male connector is changed to reinforced one	13/02/25	Pillar	
5.0	Revise HDMI label and product label	13/09/12	Pillar	
6.0	Change the wire spec, Add copper foil under the over-mould	15/06/04	Pillar	

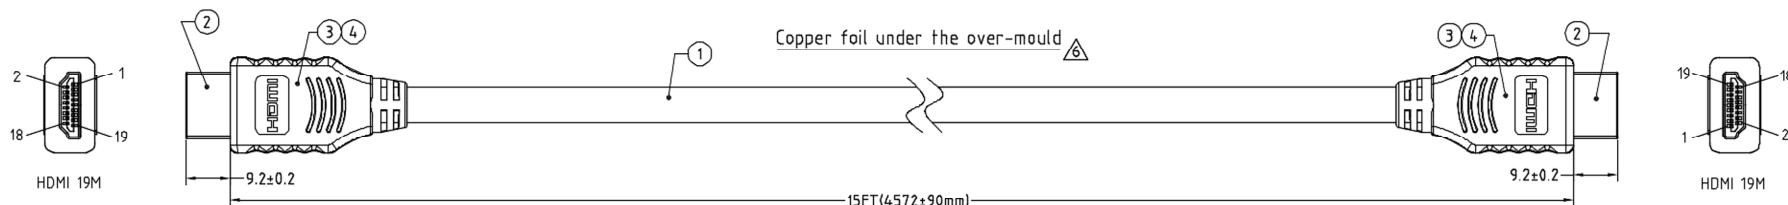

Electrical character:
1)100% Open/short/Intermittent testing
2)Withstanding voltage:DC 300V AT 10ms.
3)Insulation resistance:10M Ohm(min)
4)Residual operating current:
a.<1M=0.5mA; b.1.0~2.0M=1.0mA;
c.2.0~3.0M=2.0mA; d.3.0~5.0M=3.0mA;
e.5.0~10M=5.0mA; f.10~15M=7.0mA;
5)Conductive resistance:3 Ohm Max

PIN ASSIGNMENT(1.4v)	
HDMI 19M	HDMI 19M
3 红	Red
1 白	White
2 地	Drain
6 绿	Green
4 白	White
5 地	Drain
9 蓝	Blue
7 白	White
8 地	Drain
12 棕	Brown
10 白	White
11 地	Drain
19 黑	Black
14 白	White
17 地	Drain
13 白	White
15 黄	Yellow
16 橙	Orange
18 红	Red
SHELL 地线	Drain
	SHELL

Wire Details

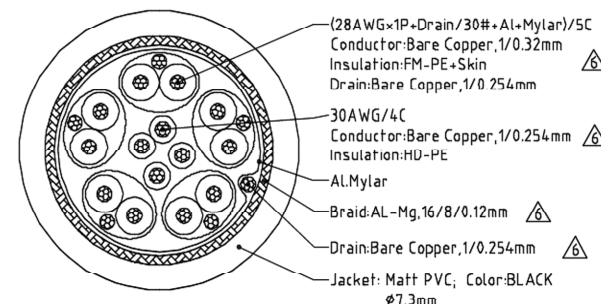

NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK
4	Overmold	PVC 60Pa Black		
3	Innermold	PE Low density		
2	Conn	HDMI 19P A type, Male, Gold plated(G/F),reinforced connector		
1	Cable	UL20276 (28HBC/1P-D/30#*A-M)/5C*30#BC/4C*Filler +A-D(30#*BC)+B[Al-Mg,16/8/0.12mm],0.073mm,Balck PVC Jacket		

Mould number:	Customer: M018UA	Customer P/N:	HA-HH14-15	Article No./ HL-GC-001		
	Designed by: Pillar	Checked by:	Approved by	File number: D-0102	Date: 15/06/04	Scale: none Unit: mm
	My Cable Mart, LLC			Name: HDMI Cable 28AWG With Ethernet		
Packing file:	This drawing contains information that is proprietary to Halink Electronics Limited incorporated and should not be used without written permission			P/N: HC.HH110728-0102	Edition: 6.0	Sheet: 1/3 A3